

Heat / Light Combination Unit 120 Volts, 14.1 amps, 60 hz.

- Grill**

White, polymeric grill (flame retardant ABS UL rated 94-5V) secured in place using 2 philips head screws easily removed if necessary, dimensions - 17 1/8" x 9 7/8".

- Light Lens**

Durable high impact polycarbonate lens. Secured in place using integral tabs.

- Blower Wheel**

Heater blower wheel - one piece metal electronically balanced, 3 1/16" x 2" with 28 fins.

- Motor**

Heater motor - Heavy duty, plug in 2 pole motor. Life time lubrication, thermally protected. Rated 120 volts, 60 hz., 0.90 amps., 2400 rpm.

- Heater Housing**


23 gauge galvanized steel housing. Dimensions 14 1/2" x 8 3/8" x 6 1/2".

- Heating Element**

Wire coil, secured in place by ceramic "J" shaped hooks and terminated by bolt and nut in cylindrical standoffs. Housed in an all metal enclosure. Rated 1500 watts - 5120 Btu.

- Lamping Information**

Main Lighting: 100 watt maximum, type A19, Medium base bulb
Night Lighting: 7 watt maximum, type C7, Candelabra base bulb

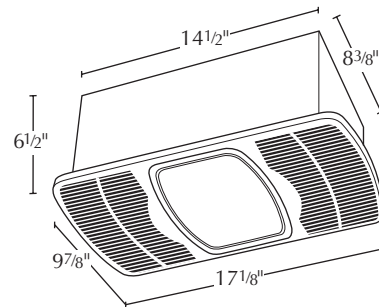

CUL - TYPE IC RATED

- Unit Mounting**

Designed for ceilings insulated to R-40. Designed to mount in ceilings with at least 6.5" of clearance. The unit will mount between joists (with 16" centers) or butted up against a joist. The housing will mount through drywall thickness up to 3/4", with a rough in opening of 14 3/4" x 8 5/8".

- Single Pack Shipping Info**

Box Dim: 19" x 10 1/2" x 8 7/8"
UPC: 0-8316229610-8
Shipping Weight: 13 lbs.

PROJECT							ARCHITECT			
LOCATION							ENGINEER			
CONTRACTOR							SUBMITTED BY			DATE
FAN NUMBER	MODEL NUMBER	CFM	IN W.G.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS	



U.S.: 820 Lincoln Drive
West Chester, Pennsylvania 19380-4466
Tel: (877)-304-3785
Fax: (610) 696-8048

Canada: 110 Glidden Road
Brampton, Ontario L6T 2J3
Tel: (905) 456-2033
Fax: (905) 456-1015