



SPECIFICATIONS
BFQ90
EXHAUST FANS

90 CFM/2.5 SONES @ 0.10" WG.
HVI CERTIFIED 120 Volts, 0.45 amps, 60 hz.

• **Grill**

White, polymeric grill secured in place with torsion springs; easily removed if necessary, dimensions - 10" x 10".

• **Blower Wheel**

One piece polymeric wheel 5¹/₈" diameter, 2³/₈" wide, with 48 fins.

• **Motor**

Heavy duty, permanently split capacitor, plug-in, 4 pole motor, life time lubrication, thermally protected, suitable for continuous operation. Rated 120 volts, 60 hz., 0.45 amps.

• **Fan Housing**

Flame retardant ABS, 0.110" thick, dimensions 8¹/₂" x 9¹/₁₆" x 4³/₄".

• **Duct Collar**

Plastic collar for 4" duct connection, comes complete with built in non-metallic back draft damper for quiet operation.

• **Ventilating Area**


For bathrooms up to 90 sq. ft. For other rooms up to 115 sq. ft.

• **Single Pack Shipping Info**

Box Dim: 11" x 12" x 6"

UPC: 0-8316220901-6

Shipping Weight: 5¹/₄ lbs.

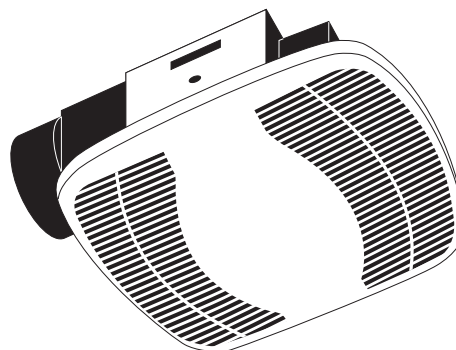

Acceptable for use over
tub or shower when
installed in a GFCI
protected branch circuit.



• **Unit Mounting**

Rated for ceilings insulated to R-40. Designed to mount in ceilings with at least 6" of clearance. The unit is mounted directly to the joist using a separate lock-in bracket (included with unit). The housing will mount through drywall thickness up to ³/₄", with a rough-in opening of 8¹/₂" x 9¹/₁₆".

PERFORMANCE

	Static Pressure (inches of w.g.)								Sones @ .1 SP	Sones @ .25 SP	Fan Speed RPM	Power Watts
	0	0.05	0.1	0.125	0.15	0.2	0.25	0.3				
Air Flow - CFM	101	95	90	88	85	81	74	65	2.5	3.0	1375	50

PROJECT							ARCHITECT					
LOCATION							ENGINEER					
CONTRACTOR							SUBMITTED BY				DATE	
FAN NUMBER	MODEL NUMBER	CFM	IN W.C.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS			



U.S.: 820 Lincoln Avenue
West Chester, Pennsylvania 19380-4466
Tel: (610) 692-7400 • 877-304-3785
Fax: (610) 696-8048

Canada: 8 Edvac Drive
Brampton, Ontario L6S 5P2
Tel: (905) 456-2033
Fax: (905) 456-1015