

PACKAGING**Berkel****250**
VACUUM PACKAGING MACHINE**Model 250**☐ **250** Vacuum Packaging Machine**STANDARD FEATURES**

- Tabletop model with a stainless steel housing and 15" (381 mm) x 14" (356 mm) x 4" (102 mm) single chamber.
- Single 12½" (318 mm) seal bar provides high integrity double sealing.
- High quality 6 m³/h Busch pump and vacuum dial gauge.
- 1-speed, ½ HP, totally enclosed, permanently lubricated ball bearings, thermally protected.
- Furnished in 115/60/1, 6.5 amp, AC.
- Vacuum intervals of 1 to 99 seconds.
- Simple to operate electronic, touch pad controls with nine storable programs.
- Attached 6-foot, flexible, 3-wire cord and plug for grounded receptacle.

OPTIONS☐ Liquid control system**FEATURES**

Berkel Model 250 is a reliable tabletop vacuum package machine designed to meet most foodservice portion control and product storage needs. The unit offers a spacious stainless steel chamber, high quality pump and single 12½" seal bar providing a high integrity double seal. The unit is simple to operate and maintain.

Berkel

a division of ITW Food Equipment Group LLC

P.O. Box 696 ■ Louisville, KY 40201 ■ Toll-free: 1-800-814-2028 ■ Local: 502-778-2791 ■ Quote & Order Fax: 1-800-444-0602

PACKAGING



250 VACUUM PACKAGING MACHINE

SPECIFICATIONS

Finish/Construction: Tabletop model with stainless steel housing and chamber.

Pump: High quality 6 m³/h Busch pump and vacuum dial gauge.

Electrical: Furnished in 115/60/1, 6.5 amp, AC.

Vacuum Chamber: Single, stainless steel 15" (381 mm) x 14" (356 mm) x 4" (102 mm) chamber; vacuum intervals of 1 to 99 seconds.


Seal Bar(s): Single, 12½" (318 mm) seal bar provides high integrity double sealing.

Controls: Simple to operate electronic, touch pad controls.

Motor: 1-speed, ½ HP, totally enclosed permanently lubricated ball bearings, thermally protected.

Cord and Plug: Attached 6-foot, flexible, 3-wire cord and plug for grounded receptacle.

Warranty: All parts, service and travel coverage for one year, excluding wear items.

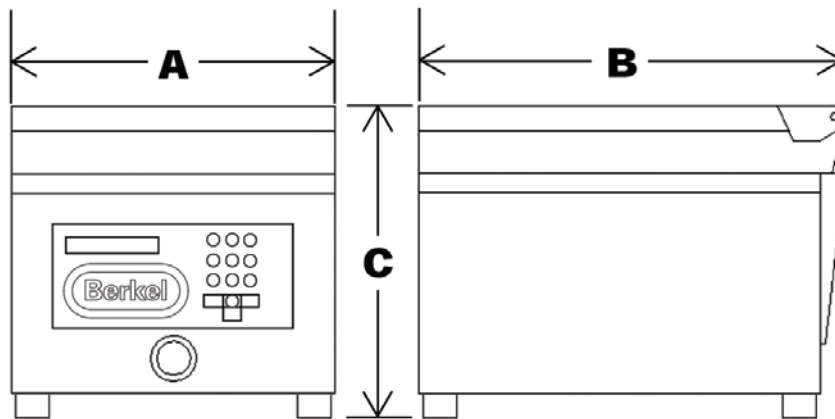

MODEL NUMBER	CHAMBER SIZE			SEAL BAR	SEAL BAR LENGTH	PRODUCT DIMENSIONS		
	WIDTH	DEPTH	HEIGHT			WIDTH A	DEPTH B	HEIGHT C
250	15" (381 mm)	14" (356 mm)	4" (102 mm)	1	12½" (318 mm)	16½" (419 mm)	21" (533 mm)	18½" (394 mm)

MODEL NUMBER	PUMP m ³ /h	ELECTRICAL	WEIGHT	BOX DIMENSIONS		
				WIDTH	DEPTH	HEIGHT
250	6	115/60/1	Net 158 lbs. (72 kg) Ship 218 lbs. (99 kg)	29" (737 mm)	22" (559 mm)	27" (610 mm)



P.O. Box 696 ■ Louisville, KY 40201 ■ Toll-free: 1-800-814-2028 ■ Local: 502-778-2791 ■ Quote & Order Fax: 1-800-444-0602

NOTE: As we continually strive to improve our products, specifications are necessarily subject to change without notice.