




CD252 & 260 SERIES MOBILE UNHEATED & HEATED ENCLOSED ROTARY DISH CARTS

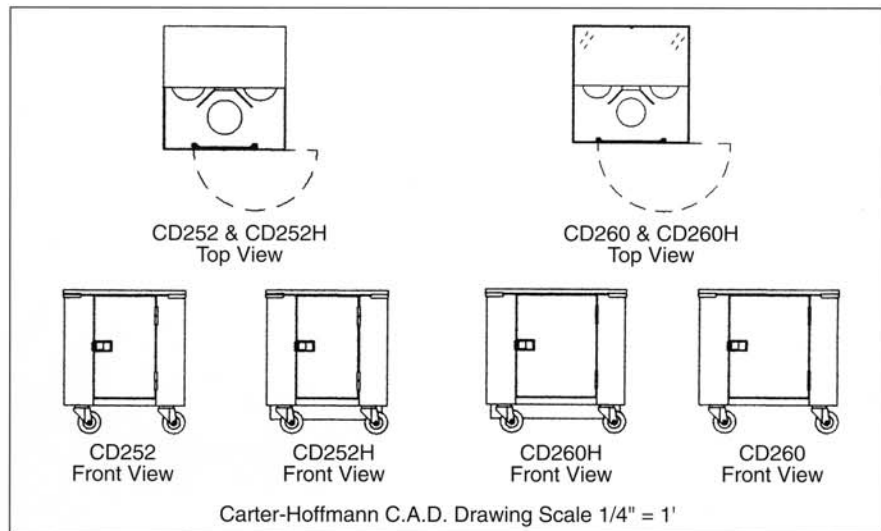

Model Number	Plate Capacity		Overall Dimensions						Caster Diameter		Class 100 Shipping Weight	
	11" dia. max.	12" dia. max.	Height in mm	Depth in mm	Width in mm	Height in mm	Depth in mm	Width in mm				
☐ CD252	252	—	32 813	28 711	28 711	32 813	28 711	28 711	5 127	5 127	190 86	196 89
☐ CD252H	252	—	32 813	28 711	28 711	32 813	28 711	28 711	5 127	5 127	190 86	196 89
☐ CD260	—	252	32 813	32 813	32 813	32 813	32 813	32 813	5 127	5 127	270 123	280 127
☐ CD260H	—	252	32 813	32 813	32 813	32 813	32 813	32 813	5 127	5 127	270 123	280 127

CONSTRUCTION...Straight line modular styling with all seams "turned in" to eliminate raw edges. Heli-spot welded to form solid cabinet.

CABINET MATERIALS...Nickel bearing type 304 stainless steel, 18 gauge polished exterior wall.

CASTERS...5" diameter, all swivel, polyurethane tread. Sealed Delrin bearing and double ball bearing swivel. Zerk grease fittings. Plate mounted and bolted to base. Two casters fitted with breaks.

DOORS...Full length, double panel stainless steel construction with interior cavity filled with 1" fiberglass high density insulation.

LATCHES...Flush mounted heavy duty sliding latch for positive door closing.

HINGES...Concealed, all stainless steel 12 gauge butt type hinge with 3/8" diameter fixed pin.

HINGED COVER...All stainless steel removable cover and lift handles. Center piano-type hinge permits cover to open for easy loading/unloading. Notched top cover allows front door to open even when top cover is closed.

HEATING SYSTEM...(CD252H, CD260H) High density 1400 watt inconel sheathed heating element. High impedance protected externally cooled fan motor with self-lubricating bearings.

CORD WRAP...(CD252H, CD260H) Keeps cord safely out-of-the-way when moving the cart.

ELECTRICAL CHARACTERISTICS...Operates on 120 volt, 60 cycle, single phase. 1400 watts, 11.7 amps. Eight foot 3 wire rubber cord with three prong grounding plug. NEMA 5-15P.

ACCESSORIES/OPTIONS...

- ☐ Full Perimeter Bumper
- ☐ Corner Bumper
- ☐ 240 V, 50 Hz
- ☐ 240 V, 60 Hz

Specifications subject to change through product improvement & innovation.

CARTER-HOFFMANN CORP.

1551 McCormick Ave., Mundelein, IL 60060

Tel (847) 362-5500 • (800) 323-9793 • Fax (847) 367-8981

www.carter-hoffmann.com

