



Featuring the
"Advanced Closed System +3"

ELECTRIC HEATED – Boilerless

Cooking Modes:

- Hot Air ■ Retherm ■ "Delta T" slow cooking
- Steam ■ "Cook & Hold" ■ "Crisp & Tasty"
- Combi

Cleveland Standard Features:

- "Advanced closed system" with "Crisp & Tasty" de-moisturizing feature
- Efficient heating system saves energy and provides fast heat up times
- Fully insulated cooking compartment for maximum energy savings
- Polished cooking compartment with coved corners for easy cleaning
- Three (3) 12" x 20" wire shelves
- Hinged fan guard and hinged removable pan racks
- Two (2) speed auto reversing convection fan for even heat distribution
- Space saving, easy to operate "Disappearing Door"
- "Antibacterial Hygienic Door Handle" with embedded silver ion protection
- Door latch with safety vent position and wear-free door switch
- Vented, double glass door with integrated door stop and self draining condensate drip tray
- Easy to change, press-fit door seal
- Oven light with shock resistant safety glass
- Multipoint core temperature probe
- Digital controls for temperature, time and core probe settings
- Self diagnostic system with full text message display
- Easy to understand menu icons with bright graphics display
- User friendly selector dial
- Exclusive "Smart Key" for selecting option settings
- Eight (8) "Press & Go" one step, recipe start buttons
- Cook book library for up to 250 stored recipe programs, each recipe capable of 20 steps
- Memory module for saving unit settings and recipes
- Smooth action hand shower for compartment cleaning
- Injection system for steam

Options and Accessories

- ☐ CONVOClean hands free automatic compartment washing system
- ☐ CONVOClean software for establishing "HACCP controls" and automatic documentation of the cooking process
- ☐ Equipment stand(s)
- ☐ Equipment stand(s) with Casters
- ☐ Stacking kit for stacking two (2) OES 6.10 models

MODEL: ☐ OES 6.10


CAPACITY: Seven (7) - 13" by 18" by 1" half size sheet pans or
 Six (6) - 12" x 20" by 2 1/2" steam table pans




Short Form Specifications

Shall be Cleveland Model: OES 6.10 Combination Convection Oven / Steamer with simple to operate programmable controls for Hot Air, Convection Steam, and Combination cooking modes, "Cook & Hold" and "Delta T" slow-cooking capabilities, "Advanced Closed System" with "Crisp & Tasty" de-moisturizing feature. Multiple cooking stage programs, stored recipe library, multipoint core temperature probe, "Press & Go", one-step recipe start buttons, "Smart Key" for selecting option settings, two (2) speed auto reversing convection fan, boilerless. "Disappearing Door". Capacity for six (6) 12" x 20" x 2 1/2" pans.


- ☐ Stacking kit for mounting one (1) OES 6.10 model on top of one (1) OES 10.10
- ☐ Lockable cover over operating controls for prison installations
- ☐ Ethernet connection for networking and controlling up to 100 units with a personal computer
- ☐ Plate rack for banquet operations
- ☐ Plate rack cart
- ☐ Thermal cover for plate or pan rack
- ☐ CONVOClean compartment cleaning solution
- ☐ CONVORinse compartment rinse cycle solution
- ☐ "Dissolve" generator descaling solution
- ☐ Chicken Grill Rack
- ☐ CONVOGrill Grilling Rack
- ☐ 12" x 20" Wire Baskets for frying products
- ☐ Additional 12" x 20" Wire Shelves
- ☐ 480 volt option
- ☐ Kleensteam II Water Filters
- ☐ easyToUCH™ control panel

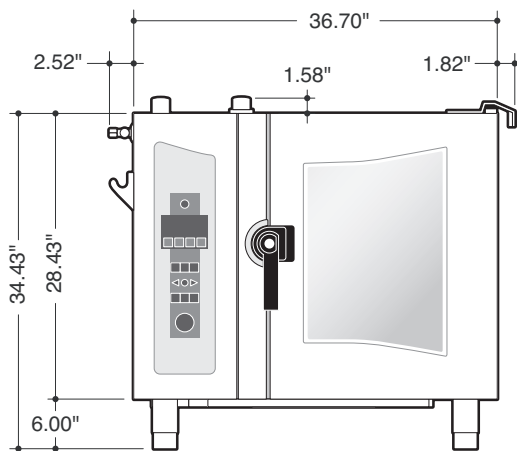

FRONT VIEW

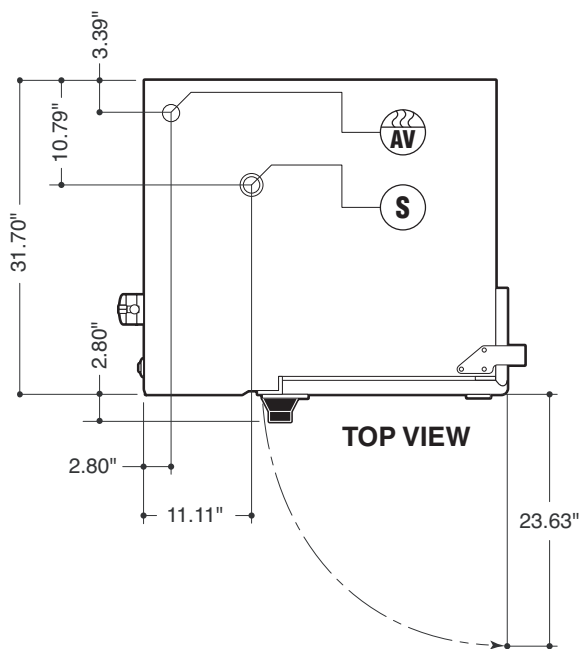

TOP VIEW

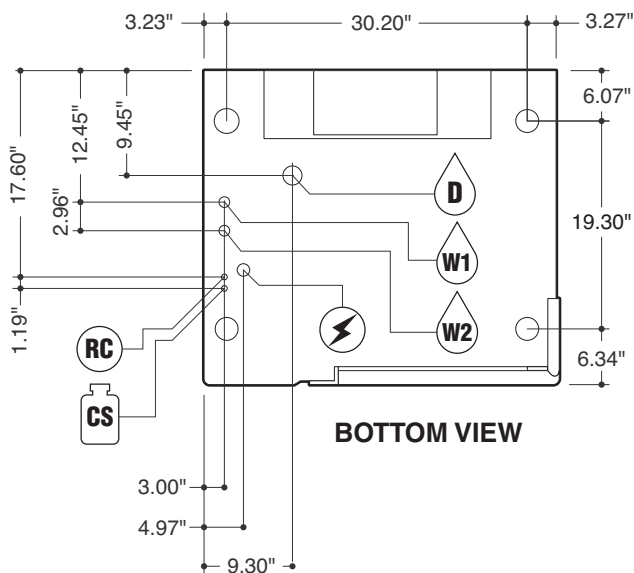

BOTTOM VIEW

NOTES:

Cleveland Range reserves right of design improvement or modification, as warranted.
Many regional, state and local codes exist and it is the responsibility of the owner and installer to comply with the codes.
Cleveland Range equipment is built to comply with applicable standards for manufacturers.

Model: OES 6.10

Pan Capacity [Unit has 7 slide rails at 2.64" (67mm) apart]:

6 (12" x 20" x 2 1/2") steam table pans 7 (12" x 20" x 1") steam table pans
7 (13" x 20") half size wire racks 7 (13" x 18") half size sheet pans
6 (12" x 20") frying baskets - (no wire racks needed)

For Banquet Operations: Optional Plate Rack holds 20 plates

Unit Dimensions: Width - 41.04", Depth - 34.50", Height - 35.13"

Shipping Dimensions: Width - 47", Depth - 41", Height - 43"
(including packaging)

Shipping Weight: 375 Lbs

Required Clearances: Rear - 2", Left Side - 4", Right Side - 2 1/2"

- Allow for sufficient distance if a "high heat source" (i.e. Broiler) is located next to the unit.
- Allow for sufficient clearance on left side for service access (contact the factory service department for recommendations).
- Installation must comply with all local fire and health codes.

Agency Approvals: UL, UL - Sanitation (NSF Standards)



Electrical Requirements:	208/3/60	240/3/60	440/3/60	480/3/60
Total Connected Load:	9.9 KW	12.8 KW	11 KW	13.1 KW
Hot Air:	8.6 KW	11.4 KW	9.1 KW	10.2 KW
Amps per Phase:	27.3	30.8	15.2	16.3
(Do not connect to a G.F.I. outlet)				

Water Connections: Cold Water (drinking water quality)
Dynamic Pressure: 35 - 60 PSI
Water Inlets: 3/4" GHT-F (Female Garden Hose Connection)



W1 Treated Water for Steam Production

W2 Untreated Water for Condenser and Hand Shower

NOTE:

The owner / operator / purchaser must ensure that the Water Quality Requirements are met. Not meeting the water quality requirements will void the original equipment warranty.

Water Quality Requirements:

TDS	< 60 ppm	pH Factor	7.0 – 8.5
Total Alkalinity	< 20 ppm	Free Chlorine	< 0.1 ppm
Silica	< 13 ppm	Conductivity	min. 20 µS/cm (50 kOhms)
Chloride	< 25 ppm		



Drain Connection: 2" Tube

Venting: Exhaust Hood required



AV Air Vent



***Connection for Cleaning Solution**



***Connection for Rinse Cycle**



Low Pressure Safety Valve

*Available as an option