

Product Name	FaHeater	Quantity		Item #	
--------------	----------	----------	--	--------	--



Note: Induction cooking requires the use of induction compatible (i.e. magnetic) pots and pans.



Standard Features

- Portable counter-top design with stainless steel housing, heavy duty electronic components, and a high impact glass-ceramic top designed for use in the commercial kitchen
- Microprocessor monitors vital components 120 times per second to check for overheating, power supply problems, and more. Charger shuts off and displays error codes enabling user to diagnose and correct minor problems
- Not for use as a cooktop. Charger heats skillet upon which food can be served and kept warm during delivery
- Three preset temperatures allow for three different temperature skillets. Charging times can be modified by end user to meet specific needs
- User friendly membrane panel is easy to operate and understand
- LED display for precise user feedback
- Sloped front panel allows for easy viewing and operation
- Easy to clean glass-ceramic top surface
- Integral cooling fan keeps internal electronics cool
- Integral grease filter and air baffle to ensure cleaner and cooler air intake
- Available in 200-240VAC
- Three year limited warranty in USA and Canada - see warranty statement for international details
- Made in the USA*

Specifications

Shall be a CookTek counter-top induction charger, model _____ with a total kW rating of _____.

Unit shall be manufactured in the United States and constructed of a stainless steel housing and a high impact glass-ceramic top.

Unit shall be equipped with auto shut-off to prevent overheating, self-diagnostics.

Unit shall operate on _____ power with integral _____ cord and plug (supplied).


*of USA and imported parts

CookTek Induction Systems, LLC
 156 N. Jefferson St. Ste 300
 Chicago, IL 60661-1436, USA
 www.cooktek.com

Tel: 1.312.563.9600 Fax: 1.312.432.6220
 Toll Free: 1.888.COOKTEK (266.5835)
 Toll Free Fax: 1.888.COOKFAX (266.5329)

FaHEATER

MCF200

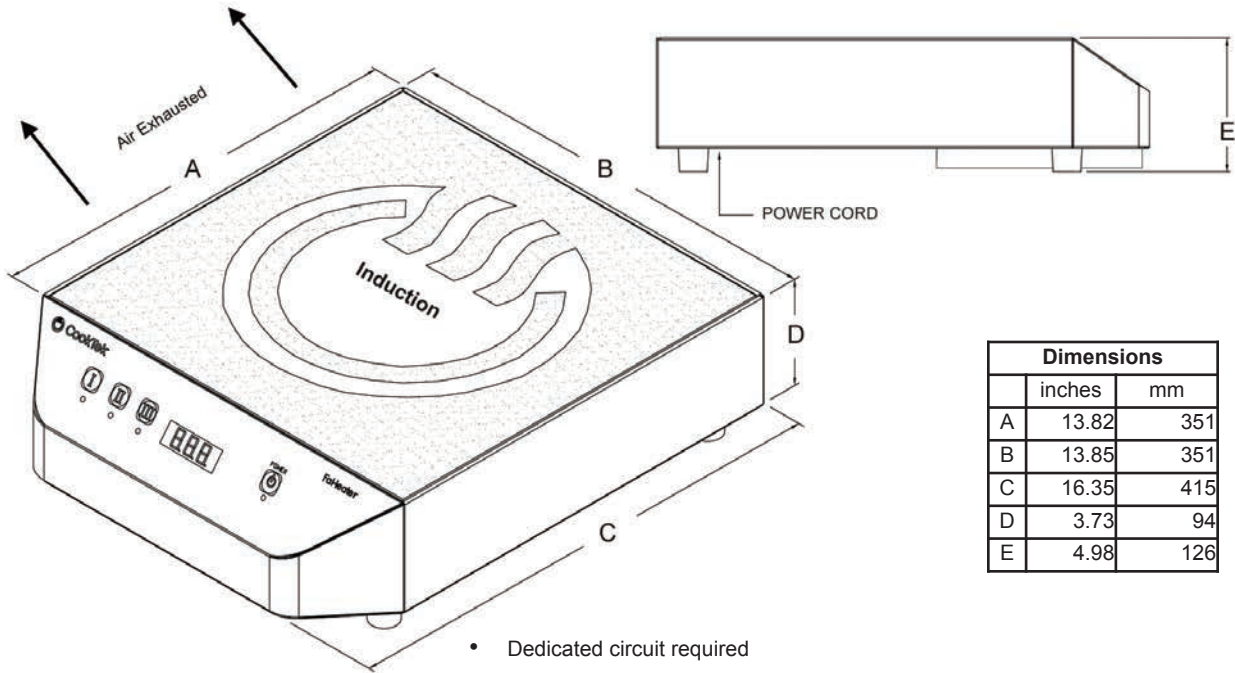

Dimensions		
	inches	mm
A	13.82	351
B	13.85	351
C	16.35	415
D	3.73	94
E	4.98	126

- Dedicated circuit required
- Requires maximum (do not exceed) ambient temperature of 50°C/122°F
- Cooling clearance: 2" (55mm) for front and rear



Specifications

Model Number	MCF200
Power Requirements	208-240VAC, 1 Ph
Power Consumption	4000W (max)
Voltage	208-240VAC, 50/60 Hz
Amperage	20A (max)
Power Range	600-4000W
Dimensions (in)	16.35" x 13.85" x 4.98"
Dimensions (mm)	415 x 351 x 126
Weight	19 lbs / 8.6 kg
Packaged Weight	24 lbs / 10.4 kg
Packaged Dimensions (in)	20.75" x 18.75" x 9"
Packaged Dimensions (mm)	527 x 476 x 228
Power Cord Length	6 ft / 1.8 m
Plug Type	Country Specific
Warranty	36 months limited parts and labor (charger only) in USA and Canada - see statement for international details

Note: Ambient air should not exceed 50°C/122°F. Dedicated circuit required. Many local codes exist, and it is the Owner and Installer's responsibility to comply with those codes. CookTek continually improves its products and reserves the right to change or improve specifications without notice.

CookTek Induction Systems, LLC
 156 N. Jefferson St. Ste 300
 Chicago, IL 60661-1436, USA
 www.cooktek.com

Tel: 1.312.563.9600 Fax: 1.312.432.6220
 Toll Free: 1.888.COOKTEK (266.5835)
 Toll Free Fax: 1.888.COOKFAX (266.5329)