


## CORRUGATED SIDEWALL UTILITY RACK 200 SERIES

### FEATURES AND BENEFITS:

- Durable utility rack for transport and storage of products on 18" x 26" pans.
- Fully welded framework of structural aluminum extrusions for rigidity and durability.
- Constructed of non-corrosive, Hi-Tensile aluminum for strength.
- Corrugated sidewalls securely hold 18" x 26" pans on 1-1/2" centers without tipping. Provides added strength.
- Offers complete flexibility for operator's selection of pan spacing. Eliminates potential of product damage.
- Heavy duty 5" swivel casters, two with brakes. Provides mobility when fully loaded.

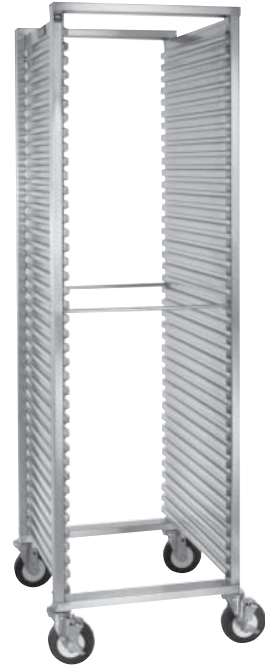

200-1841A




### ACCESSORIES and OPTIONS (Available at extra cost):

- Pan Stop
- Corner Bumpers
- Vertical Bumpers
- Perimeter Bumper
- Rotary Bumpers (for use with 5" casters)
- Floor Lock (for use with 5" casters)
- Various Caster Options

See page G-36 for accessory details.

## 200 Series

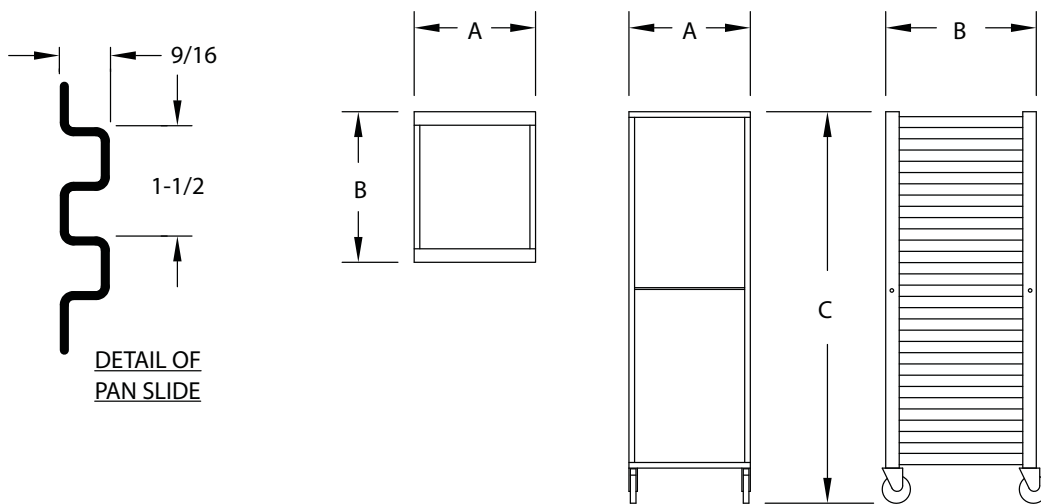

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS			WEIGHT ACT.	
	CAP	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
200-1841A	39	18 X 26	IN	21-13/16	26-3/4	69-9/16	18-1/16	26	61-3/8	LBS	66
		460 X 660	MM	555	680	1770	460	660	1555	KG	30
200-1833A	31	18 x 26	IN	21-13/16	26-3/4	57-9/16	18-1/16	26	49-3/8	LBS	55
		460 x 660	MM	555	680	1465	460	660	1250	KG	25

- NOTES: 1. Send sample pan or tray with order when using any that are not 18" x 26" pans with heavy beaded edges.  
2. When ordering bumpers, add 2" to overall dimensions.

ALL ALUMINUM CONSTRUCTION IS RIVETED, WELDED AND FINISHED.

### RACK:

- Posts: Extruded channels, 1-1/16 x 2 x .125.
- Top and bottom: Extruded channels, 1-1/16 x 2-3/8 x .188; welded to posts.
- Tie rods (2): 3/8 dia. rods; welded to posts.
- Sides: .063 aluminum corrugations riveted to posts.
- Casters: 5" dia., swivel, modulus tires, 1-1/4 wide, load cap. 250 lbs. each, temp. range -45°/+180°F. Delrin bearings. Two casters equipped with brakes.

### PAN SLIDES:

- Corrugations act as pan slides on 1-1/2" centers.

### SHORT FORM SPECIFICATIONS

Cres Cor Utility Rack Model 200-\_\_\_\_. Extruded aluminum welded construction. Tie rods (2) applied at front and rear. No-tip corrugated sides for ( \_ ) 18" x 26" pans on 1-1/2" centers. 5" swivel modulus casters, Delrin bearings. Load capacity 250 lbs. each, temperature -45° to +180°F. 2 year parts warranty. Provide the following accessories: \_\_\_\_\_. NSF listed.



5925 Heisley Road • Mentor, OH 44060-1833  
Phone: 877/CRESCOR • Fax: 440/350-7267  
www.crescor.com

© Crescent Metal Products, Inc. 2008 All rights reserved.

*In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.*

Litho in U.S.A.