

UNIVERSAL ANGLE ROLL-IN REFRIGERATOR RACKS 207-UA SERIES

FEATURES AND BENEFITS:

- Durable rack specifically designed to fit roll-in or pass through refrigerators, freezers, and warming cabinets; eliminates unnecessary product handling while maintaining proper temperature levels. Holds a variety of pan sizes.
- Fully welded framework of structural aluminum extrusions for rigidity and durability.
- Constructed of non-corrosive, Hi-Tensile aluminum for strength.
- Chrome plated wire universal angles adjustable on 1-1/2" centers. Extruded aluminum bottom angle permanently welded in place.
- Inboard heavy duty 5" swivel casters, two with brakes. Wheel placement permits easy "in-and-out" of roll-ins.
- Two styles available; Custom (C) or Deluxe (D). Deluxe includes perimeter bumper and enclosed base.



207-UA-12-AC




ACCESSORIES and OPTIONS (Available at extra cost):

- Extra Universal Angles
- Pan Stop
- Corner Bumpers
- Vertical Bumpers
- Various Caster Options

See page G-36 for accessory details.

207-UA Roll-In Series

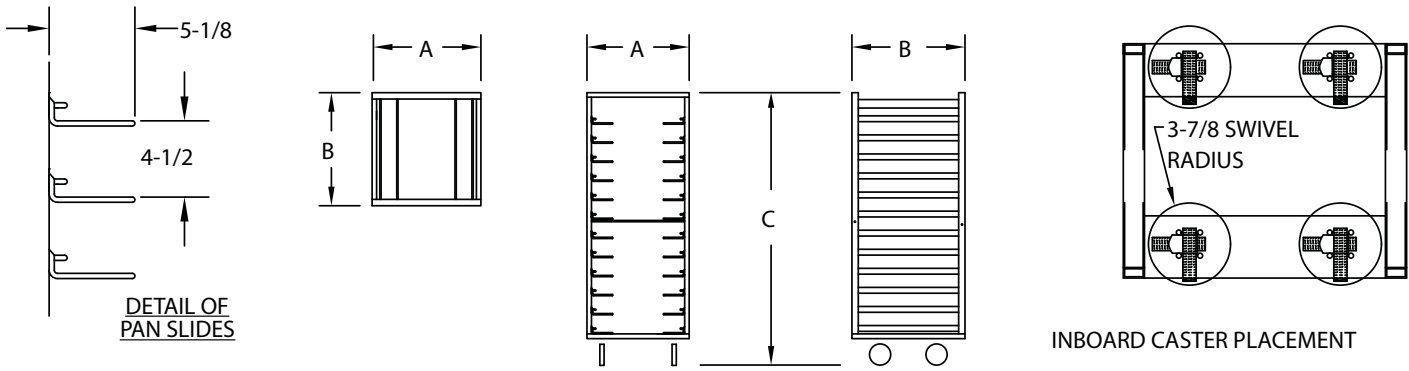

CUSTOM ("C")

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS				WEIGHT ACT.
	CAP/ ANGLES	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
207-UA-12-AC	12 SETS	SEE NOTE BELOW	IN	24-1/2	24-15/16	64-1/2	21-3/4	24-1/2	55-15/16	LBS	68
			MM	625	635	1640	555	625	1425	KG	31

DELUXE ("D")

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS				WEIGHT ACT.
	CAP/ ANGLES	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
207-UA-12-AD	12 SETS	SEE NOTE BELOW	IN	26-3/8	26-13/16	64-1/2	21-3/4	24-1/2	55-15/16	LBS	73
			MM	670	685	1640	555	625	1425	KG	33

NOTES: 1. Pan sizes 22" x 20" (560 x 510) Roast & Bake Pans, 10" x 20" (255 x 510) Roast & Bake Pans, 18" x 26" (460 x 660) Bun Pans, 14" x 18" (355 x 460) Service Trays, 12" x 20" (305 x 510) Steam Table Pans.
Refer to Pan Size Chart at end of section.

2. When ordering bumpers, add 2" to overall dimensions.

ALL CONSTRUCTION IS RIVETED, WELDED AND FINISHED.

RACK:

- Posts: Extruded aluminum channels, 1-1/16 x 2 x .125.
- Top and bottom: Extruded aluminum channels, 1-1/16 x 2-3/8 x .188; welded to posts.
- Tie rods (2): 5/16 dia. steel rods enclosed in aluminum tubing; fastened to posts.
- Bolsters: Formed .125 aluminum; welded to posts, casters attached.
- Casters: 5" dia., swivel, modulus tires, 1-1/4 wide, load cap. 250 lbs. each, temp. range -45°/+180°F. Delrin bearings. Two casters equipped with brakes.

DELUXE ("D") MODELS:

- Base plate: One piece .063 aluminum.
- Bumper: 1" wide gray rubber, perimeter type.

PAN SLIDES:

- Wire angles (.306 dia.), nickel chrome plated steel, spaced on 4-1/2" centers, adjustable on 1-1/2" centers.
- Bottom extruded angle, welded to posts.

SHORT FORM SPECIFICATIONS

Cres Cor Roll-In Refrigerator Rack Model 207-UA-12-A (C) or (D). Extruded aluminum welded construction. Tie rods (2) applied at front and rear. (12) sets wire universal angles for multiple pan sizes, adjustable spacing every 1-1/2". Formed .125 bolsters. Inboard 5" swivel modulus casters, Delrin bearings. Load capacity 250 lbs. each, temperature -45° to +180°F.

- Custom Model (C)
- Deluxe Model (D) has .063 aluminum base plate; perimeter bumper.

2 year parts warranty. Provide the following accessories:
_____. NSF listed.



5925 Heisley Road • Mentor, OH 44060-1833
Phone: 877/CRESCOR • Fax: 440/350-7267
www.crescor.com

© Crescent Metal Products, Inc. 2008 All rights reserved.

In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.

Litho in U.S.A.