

## UNIVERSAL ANGLE UTILITY RACK MODEL 207-UA-13A

### FEATURES AND BENEFITS:

- Durable utility rack for transport and storage of products on a large variety of pan sizes.
- Fully welded framework of structural aluminum extrusions for rigidity and durability.
- Constructed of non-corrosive, Hi-Tensile aluminum for strength.
- Chrome plated wire universal angles adjustable on 1-1/2" centers. Thirteen sets of angles provided, twelve are adjustable.
- Heavy duty 5" swivel casters, two with brakes. Provides mobility when fully loaded.



207-UA-13A  
(Pans not included)




### ACCESSORIES and OPTIONS (Available at extra cost):

- Extra Universal Angles
- Pan Stop
- Corner Bumpers
- Vertical Bumpers
- Perimeter Bumper
- Rotary Bumpers (for use with 5" casters)
- Floor Lock (for use with 5" casters)
- Various Caster Options

See page G-36 for accessory details.

# 207-UA-13A

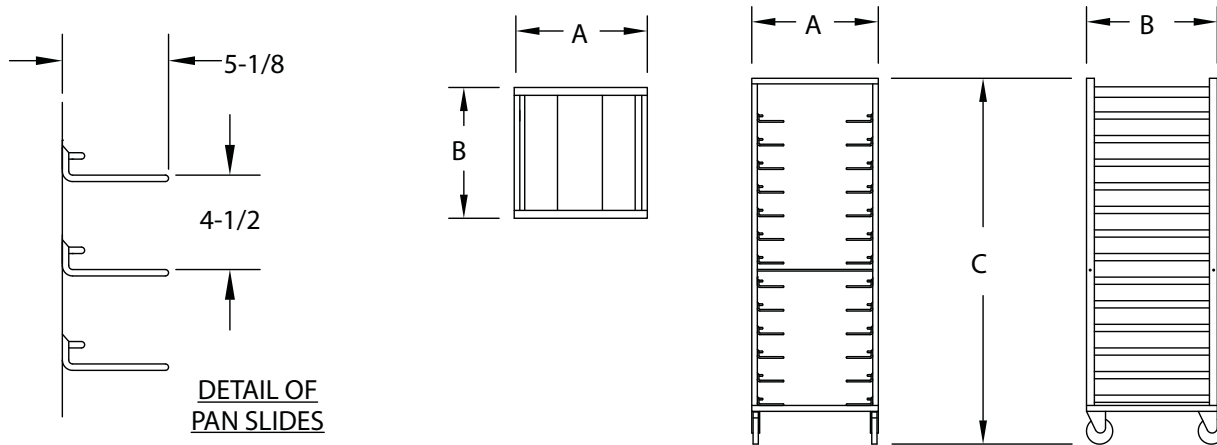

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS				WEIGHT ACT.
	CAP/ ANGLES	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
207-UA-13A	13 SETS	SEE NOTE BELOW	IN	25-3/8	24-15/16	69-3/4	21-3/4	24-3/8	61-1/2	LBS	68
			MM	645	635	1775	555	620	1565	KG	31

NOTES: 1. Pan sizes 22" x 20" (560 x 510) Roast & Bake Pans, 10" x 20" (255 x 510) Roast & Bake Pans, 18" x 26" (460 x 660) Bun Pans, 14" x 18" (355 x 460) Service Trays, 12" x 20" (305 x 510) Steam Table Pans. Refer to Pan Size Chart at end of section.  
 2. When ordering bumpers, add 2" to overall dimensions.

ALL ALUMINUM CONSTRUCTION IS RIVETED, WELDED AND FINISHED.

### RACK:

- Posts: Extruded channels, 1-1/16 x 2 x .125.
- Top and bottom: Extruded channels, 1-1/16 x 2-3/8 x .188; welded to posts.
- Tie rods (2): 5/16 dia. steel rods enclosed in aluminum tubing; fastened to posts.
- Casters: 5" dia., swivel, modulus tires, 1-1/4 wide, load cap. 250 lbs. each, temp. range -45°/+180°F. Delrin bearings. Two casters equipped with brakes.

### PAN SLIDES:

- Wire angles (.306 dia.), nickel chrome plated steel, spaced on 4-1/2" centers, adjustable on 1-1/2" centers.
- Bottom extruded angle, welded to posts.

### SHORT FORM SPECIFICATIONS

Cres Cor Utility Rack Model 207-UA-13A. Extruded aluminum welded construction. Tie rods (2) applied at front and rear. (13) sets wire universal angles for multiple pan sizes, adjustable spacing every 1-1/2". 5" swivel modulus casters, Delrin bearings. Load capacity 250 lbs. each, temperature -45° to +180°F. 2 year parts warranty. Provide the following accessories: \_\_\_\_\_. NSF listed.



5925 Heisley Road • Mentor, OH 44060-1833  
 Phone: 877/CRESCOR • Fax: 440/350-7267  
 www.crescor.com

© Crescent Metal Products, Inc. 2008 All rights reserved.

*In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.*

Litho in U.S.A.