

ROAST-N-HOLD™ UNDERCOUNTER CONVECTION OVEN MODEL CO-151-XUA-5B

FEATURES AND BENEFITS:

- Fully insulated undercounter Roast-N-Hold gentle convection oven designed for flavorful results by slow roasting.
- Slow convected air system promotes natural browning for flavor and seals in natural juices. Slow roasting means 15% to 20% less shrinkage.
- Efficient 1920 Watt power unit allows for reheating of prepared meals or bulk items. Maximum temperature 350°F. (176.5°C.).
- Pre-setting automatic controls for roasting and holding cycles allows for unattended operation 24 hours a day.
- Roast and hold over 100 lbs. (45.4 kg.) of meat in just 6 sq. ft. of floor space. Convenient undercounter height makes the most of valuable kitchen space.
- Non-venting oven, permitted by most local codes, provides easy, inexpensive installation.
- Self-contained power top lifts off for ease of maintenance; available to suit your power requirements.
- Stainless steel construction throughout for ease of cleaning.
- Smooth interior coved corners prevent food particle/grease buildup.
- Field reversible insulated door prevents temperature loss. Silicone door gasket for proper seal. High temperature ceramic magnetic latch for "easy open" and security during transport.
- Safety conscious anti-microbial latch protects against spreading germs. Standard with right hand hinging; left hand hinging available upon request.
- Chrome plated wire universal angles accommodate a large variety of pan sizes on adjustable 1-1/2" spacing. Supplied with five sets of angles and two raised wire grids.
- Heavy duty 2-1/2" swivel casters, two with brakes. Provides mobility when fully loaded.
- Ovens can be stacked for flexibility.
- Free cooking manual and operation manual provided with the purchase of any Roast-N-Hold Oven.




CO-151-XUA-5B



ACCESSORIES and OPTIONS (Available at extra cost):

- Stacking Kit
 - Security Panel for Controls
 - Tempered Glass Door Window
 - Key Lock Latch
 - Extra Universal Angles
 - Extra Wire Grids
 - Side and Rear Bumpers
 - 4700 Watts, 208 or 240 Volts, 1 or 3 Phase
- See page E-10 for accessory details.

CO-151-XUA-5B

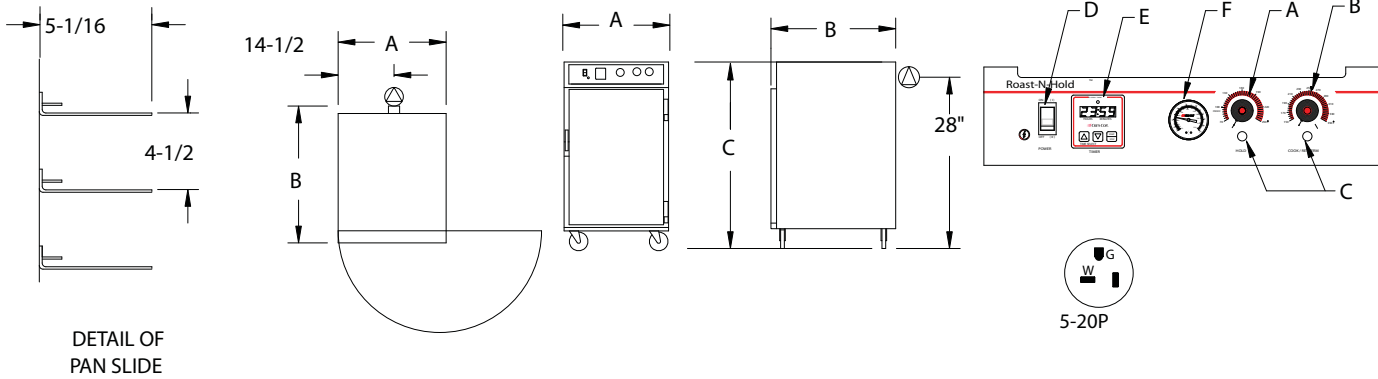

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS				WEIGHT ACT.
	CAP/ANGLES	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
CO-151-XUA-5B	5 SETS	SEE NOTE BELOW	IN	28	35-3/4	32	21-1/4	26-1/2	20	LBS	200
			MM	715	910	815	540	675	510	KG	91

Note: Refer to pan size chart at end of section.
ALL CONSTRUCTION IS RIVETED, WELDED AND FINISHED.

CABINET:

- Body: 22 ga. stainless steel.
- Reinforcement: Internal framework of 16 ga. stainless steel.
- Insulation: Fiberglass, thermal conductivity (K factor) is .23 at 75°F. 1-1/2" in back wall, doors, base; 2" in side walls.
- Air tunnel: 20 ga. stainless steel, lift-out type, mounted on rear wall.

BASE:

- One piece construction, .125 aluminum.
- Casters: 2-1/2" dia., swivel, polyolefin tires, 1-1/8 wide, load cap. 150 lbs. each, temp. range -40°/+180°F. Plain bearings. Front casters equipped with brakes.

DOOR:

- Field reversible.
- Formed 22 ga. stainless steel.
- Latch: Anti-microbial chrome plated zinc with composite handle, ceramic magnetic type; mounted inboard.
- Hinges: Heavy duty chrome plated zinc, lift-off type; mounted inboard.
- Gasket: Perimeter type, silicone.
- Pan stop: Embossed.

PAN SLIDES:

- Wire angles (.306 dia.), nickel chrome plated; mounted on lift-out posts.
- (5) sets of angles adjustable on 1-1/2" centers.
- Grids (2): Nickel chrome plated steel, raised wire 17" x 25".

POWER REQUIREMENTS AVAILABLE:

- 1920 Watts, 120 Volts, 60 Hz., 1 phase, 16 Amps.,
- 20 Amp. service.

POWER UNIT COMPONENTS: (refer to above drawing)

- Body: Formed 20 ga. stainless steel with black control panel, recessed and tilted 7°.
- A) Thermostat (holding): Solid state, 140°F. (60°C.) to 250°F. (121°C.).
- B) Thermostat (cook/retherm): Solid state, 140°F. (60°C.) to 350°F. (176.5°C.).
- C) Pilot lights (2).
- D) Switch: Lighted ON-OFF rocker type.
- E) Timer: 24 hr. digital countdown; infinite memory retention.
- F) Thermometer.
- Power cord: Permanent, 6 ft., 12/3 ga. with right angle plug.
- Heater: 1920 Watts.
- Blower motors (2).
- Vent fans (2).

INSTALLATION REQUIREMENTS:

- Check local vent hood codes for mobile Roast-N-Hold ovens.

SHORT FORM SPECIFICATIONS

Cres Cor Roast-N-Hold Under Counter Convection Oven Model CO-151-XUA-5B. Removable power unit 20 ga. stainless steel, recessed control panel. Cabinet and door 22 ga. stainless steel; stainless steel internal frame; coved corner interior. Fiberglass insulation in sides 2"; back, door and base 1-1/2". High temperature anti-microbial magnetic latch. (5) sets universal angles for multiple pan sizes and spacing. One piece base .125 aluminum. 2-1/2" swivel polyolefin casters. Load capacity 150 lbs. each. 2000 Watts, 120 Volts, 60 Hz., 1 Phase. 2 year parts warranty. Provide the following accessories: _____ .
CSA-US, CSA-C, CSA to NSF4 listed.



5925 Heisley Road • Mentor, OH 44060-1833
Phone: 877/CRESCOR • Fax: 440/350-7267
www.crescor.com

© Crescent Metal Products, Inc. 2008 All rights reserved.

In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.

Litho in U.S.A.