## BADVENTYS

## INDUCTION

# Intertek UL197 CSA 22.2



## CONCEPT

#### INDUCTION COOKERS FOR PROFESSIONALS

High energy efficiency (90%) and your cooking area stays cool too!

- ☐ Stainless steel casing
- ☐ Counter-top installation
- ☐ Easy to clean capacitive touch controls
- ☐ Superior airflow and cooling fans permit all day use
- ☐ Large induction coil for stockpots and pans
- ☐ Automatic pan detection / power supply monitor
- ☐ Controlled high temperature feature for stir fry and sauté
- Precision low temperature control for sauces and chocolates
- ☐ Empty pan security/automatic overheating protection
- ☐ Small article protection/oil auto ignition shutoff
- ☐ Removable grease filter to clean air intake

#### CHEETAH

GL1800 PB or C

120 V



- · Durable 4mm vitroceramic glass
- Lexan push button controls (PB): on/off + (12) power levels + timer + boost
- Capacitive touch controls (C): on/off + (20) power levels + timer

#### INDUCTION TECHNOLOGY

**How does it work?** Induction is a basic principal of physics. When the electric current goes through a copper coil it creates a magnetic field. The pan attracts the magnetic field and creates heat. Induction technology is over **90% efficient**, therefore there is no waste of power or heat. As soon as the pan is removed, the induction unit turns off and **saves you energy**.

#### PERSICA

**GL2-3500** 208/240 V



- · Durable 4mm vitroceramic glass
- · 1750 watts either side total: 3500 watts
- Two (2) 8" coils
- Control panel: on/off + (20) power levels + 99 min. timer

#### LIGER

**GLW3500** 208/240 V



- Heavy duty 6mm vitroceramic glass
- 11" curved coil for fast heat transfer
- · Uniform temperature at bottom and sides
- Stainless steel edge frame protects glass and pan
- 14½" (36cm) dia. wok fits 11¾" (30cm) dia. wok opening
- Control panel: on/off + (+/-) + (20) power levels + 99 min. timer





# BADVENTYS






Induction Warmers and Cookers

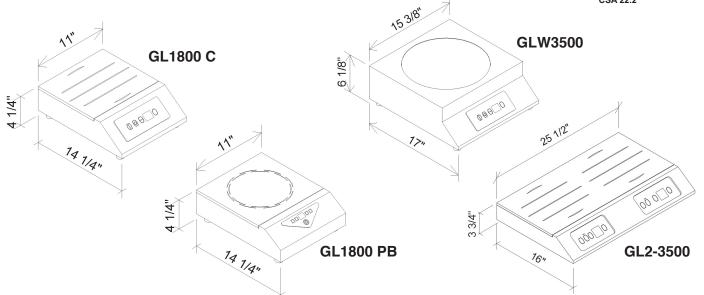

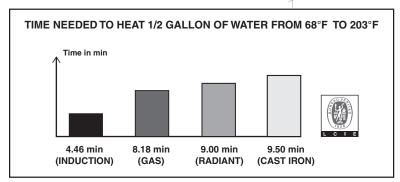

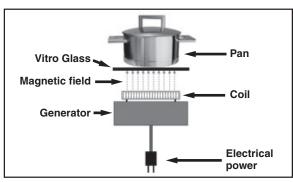

INSTALLATION CLEARANCE: 2" EACH SIDE, AND BACK FROM WALL SURFACES

### SPECIFICATIONS

## NOTE: REQUIRES THE USE OF INDUCTION READY COOKWARE

MODEL	ELECTRICAL	EXTERIOR DIMENSIONS	SHIPPING WEIGHT	NEMA PLUG
GL1800 PB	120V, 1PH 1.8KW, 15 Amps	11"W x 14¼"D x 4¼"H	18 lbs	5 - 15P
GL1800 C	120V, 1PH 1.8KW, 15 Amps	11"W x 14¼"D x 4¼"H	18 lbs	5 - 15P
GL2-3500	208/240V, 1PH 3.5KW, 15/17 Amps	25½"W x 16"D x 3¾"H	22 lbs	L6 - 30P
GLW3500	208/240V, 1PH 3.5KW, 15/17 Amps	15%"W x 17"D x 61/8"H	30 lbs	L6 - 30P

WARRANTY: Limited two-year parts and labor

