



| | | | |
|----------|--------|-----------|----------|
| PROJECT: | MODEL: | QUANTITY: | ITEM NO: |
| | | | |

STACKING HANDY LINE COMPARTMENTS

For 12" x 20" and Gastro-Norm 1/1 Bulk Food Pans

"HLC STACKING SERIES"



HLC-5S
Shown with stacking angles
and base dolly.

Base Dolly



HLC-5S
stacked
on an
HLC-8S
with stacking
angles

There's no limit to the versatility of these handy stackable cabinets - natural radiant heat helps food taste their best!



FWE's natural convection heat/humidity system allows a soft radiate heat throughout the cabinet, perfect for holding pre-cooked foods for either short or prolonged periods of time. Serve appetizing food presentations from these units that help you produce consistent and better tasting foods.

Hold and serve the best possible foods with FWE's Stacking Pan Servers. Designed to accommodate 12" x 20" and GN 1/1 pans, these small holding cabinets do not require forced air movement. FWE's unique pan slide racks are one piece die stamped stainless steel, providing greater hygiene and strength. The front edges are relieved for easy loading and the pair of racks are removable for easy cleaning. Mix and match sizes allow you to stack them to suit your capacities.

Perfect for built-in applications!

- ◇ All stainless steel
- ◇ Welded construction - no rivets
- ◇ Tubular stainless steel welded base frame
- ◇ Recessed up-front controls
- ◇ Heavy-duty door hinges
- ◇ Positive close door latch
- ◇ Stainless steel lift handles
- ◇ Individually controlled compartments
- ◇ Hi-temp door gasket
- ◇ Fully insulated throughout
- ◇ Stainless steel pan slides
- ◇ Two year limited warranty



PROJECT:

MODEL:



QUANTITY:

ITEM NO:

SPECIFICATIONS:

STACKING HANDY COMPARTMENTS

For 12" x 20" and GN 1/1 Bulk Food Pans

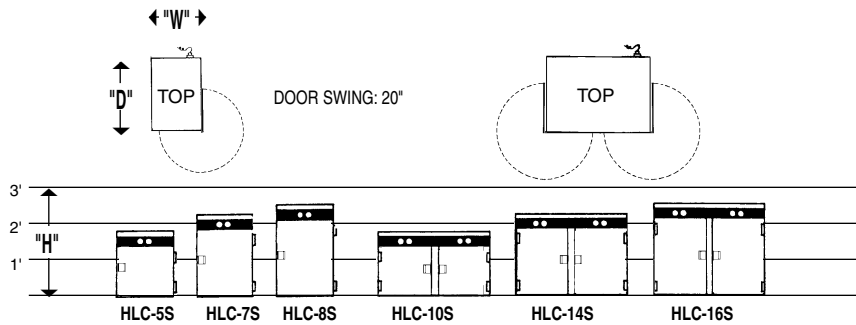

| MODEL NUMBER | CAPACITIES OF 12" x 20" or GN 1/1 PANS [A] | | | | | | OVERALL EXTERIOR DIMENSIONS IN. (mm) | | | NO. OF DOORS | CASTER SIZE | SHIP WT. LBS. (KG) | CUBIC FEET (m ³) |
|------------------|--|----|----|-----------------------|-------|-------|--------------------------------------|-------------|--------------|--------------|-------------|--------------------|------------------------------|
| | 2.625" FIXED SPACINGS | | | 66.7mm FIXED SPACINGS | | | HIGH "H" | DEEP "D" | WIDE * "W" | | | | |
| | DEPTH 12" x 20" PANS | | | DEPTH GN 1/1 PANS | | | | | | | | | |
| | 2.5" | 4" | 6" | 65mm | 100mm | 150mm | | | | | | | |
| HLC-5S † | 5 | 2 | 2 | 5 | 2 | 2 | 21" (533) | 27.5" (698) | 18.25" (464) | 1 | NONE | 95 (44) | 6.10 (.17) |
| HLC-7S † | 7 | 3 | 2 | 7 | 3 | 2 | 26.25" (667) | 27.5" (698) | 18.25" (464) | 1 | NONE | 105 (48) | 7.62 (.22) |
| HLC-8S | 8 | 4 | 3 | 8 | 4 | 3 | 30" (762) | 27.5" (698) | 18.25" (464) | 1 | NONE | 120 (54) | 8.35 (.24) |
| HLC-10S † | 10 | 4 | 3 | 10 | 4 | 3 | 21" (533) | 27.5" (698) | 35.25" (896) | 2 | NONE | 155 (70) | 11.78 (.33) |
| HLC-14S † | 14 | 6 | 4 | 14 | 6 | 4 | 26.25" (667) | 27.5" (698) | 35.25" (896) | 2 | NONE | 170 (78) | 14.73 (.42) |
| HLC-16S | 16 | 8 | 6 | 16 | 8 | 6 | 30" (762) | 27.5" (698) | 35.25" (896) | 2 | NONE | 190 (86) | 16.13 (.46) |
| HLC-1DBD | BASE DOLLY WITH 5" CASTERS - Single Door | | | | | | 5.5" (140) | 28" (711) | 18.75" (476) | -- | NONE | 14 (6) | 1.67 (.05) |
| HLC-2DBD | BASE DOLLY WITH 5" CASTERS - Double Door | | | | | | 5.5" (140) | 28" (711) | 35.75" (908) | -- | NONE | 28 (13) | 3.19 (.09) |

[A] Combinations of deep and shallow pans may be used with varying capacities.

NOTE: Dimensions given are without angles, dolly, or casters.

* Note: If omitting drop handles, subtract 1.25" from overall exterior width.

† Indicates suggested TOP stacking units. When stacking mix and match sizes, consider the overall stability. Stacking a shorter unit upon a taller unit achieves the best stability.

| ELECTRICAL DATA | | |
|-----------------|------------------------|---------------------------|
| | HLC-5S, HLC-7S, HLC-8S | HLC-10S, HLC-14S, HLC-16S |
| VOLTS | 120 | 120 |
| WATTS | 500 | 1000 |
| AMPS | 4.3 | 8.3 |
| HERTZ | 50/60 | 50/60 |
| PHASE | Single | Single |
| NEMA PLUG | 5-15P | 5-15P |

Dedicated circuit.

- Pass-thru Door [add "P"] is available on all model sizes. Add 2.5" to depth dimension.
- See-thru Lexan Door [add "L"] is available on all model sizes.

CONSTRUCTION. Heliarc welded, single unit construction of stainless steel; 20-gauge polished exterior, 22-gauge stainless steel interior with easy-to-clean covered corners. welded tubular base frame shall be 1" square, heavy gauge stainless steel tubing, with 10-gauge stainless steel reinforcing stress plates at corners.

INSULATION. "Ultra-Guard" UG-26 high density fiberglass insulation throughout; top, back, bottom, sides and door(s).

HANDLES. Heavy-duty stainless steel, side-mounted lift handles.

DOORS AND LATCHES. Flush mounted, double pan, stainless steel doors shall have 1" thick fiberglass insulation. High temperature door gasket mounted on cabinet. Each door shall be equipped with flush-in-door stainless steel paddle latch; positive closing. Each door shall have two (2) heavy-duty lift-off hinges and allow 270° door swing.

PAN SLIDES. Stainless steel racks shall be one piece die stamped channel-type pan slides at 2.625" (66.7 mm) spacings to accommodate either deep or shallow 12" x 20" or GN 1/1 pans (at varying capacities - see chart). Racks are removable without tools for cleaning. Racks shall lift off heavy-duty stainless steel supports.

HEATING SYSTEM/CONTROLS. Radiant heat system shall include an Incoloy nickel-chromium alloy heating element. Baffled humidifier pan shall be provided. Controls shall be up-front, recessed and shall include a full range thermostat adjustable to actual temperature. Thermostat shall include temperature scale marked in ten degree increments (F/C) from 90° to 190°F (30° to 90°C). An operational range thermometer, power supply light and thermostat cycling light are also included.

ELECTRICAL CHARACTERISTICS.

3 wire grounded 10 foot extension power cord and plug, rear mounted for safety. See electrical data chart above for amperage and receptacle configuration. Dedicated circuit.

FWE Products are used by major companies world-wide. We can modify, design, or custom build equipment to fit your special requirements.

Optional Accessories:

- Electronic controls
- Digital thermometer
- 220 volt, 50/60 Hz, single phase
- CE compliant
- Heat retention battery
- See-thru Lexan door
- Pass-thru door
- Key locking door latch
- Magnetic latch
- Padlocking transport latch
- Left hand door hinging
- Security packages
- All swivel or larger casters
- Door edge trim
- Full extension bumper
- Corner bumpers
- Cold plate cartridge
- Custom pan slide spacing
- Dolly with all swivel casters



Food Warming Equipment Company, Inc.

P.O. Box 1001
Crystal Lake, IL 60039 USA
800-222-4393; 815-459-7500
Fax: 815-459-7989

Manufacturing Facilities:
7900 S. Route 31
Crystal Lake, IL 60014 USA
www.FWE.com sales@fweco.net

FWE products may be covered under one or more of the following U.S. patents: 288,299;238,300;3,952,609;4,192,991.

All specifications subject to change without notice.
© 10G Food Warming Equipment Company, Inc.