

Project

Item #

Quantity



GLOBE FOOD EQUIPMENT COMPANY

Label Printing Scale

GSP30A



# GSP30A Label Printing Scale



### Model

GSP30A - Label Printing Scale



NTEP Approved  
Meets NIST  
Handbook 44 Criteria  
Legal for Trade



### Standard Features

- Weighs from .01 lb. to 30 lbs.
- Stores up to 3800 PLU's
- Thermal dot printer
- Scale prints
  - PLU name
  - Extra message
  - Sell by date
  - Packed date
  - Unit price
  - Tare
  - Weight
  - PLU number
  - Total price
  - Bar code
  - Store name
  - Store address
- Automatic or digital entry tare
- 88 one-touch preset keys
- Fluorescent tube display of tare, weight, unit price, and total price
- Removable stainless steel platter

### Standard Warranty

- 1 year parts and labor

### Optional Accessories

- Standard labels (Case of 12 Rolls)
- Safe handling labels (Case of 12 Rolls)
- Plastic Scale Scoop (10" dia. x 2.5" deep)



Approved By: \_\_\_\_\_

Date: \_\_\_\_\_



**GLOBE FOOD EQUIPMENT COMPANY**



[www.globeslicers.com](http://www.globeslicers.com)

2153 Dryden Rd  
Dayton, OH 45439  
Phone: 937-299-5493  
Phone: 800-347-5423  
Fax: 937-299-4147



## Specifications

Capacity:	30 lbs. x .01 lb.
Platter Size:	14.02" x 9.21" (35.61cm x 23.39cm)
Construction:	Durable ABS (white), Stainless Steel Platter
Display:	Fluorescent, Tube, .5" High
Display Information:	Tare, Weight, Unit Price, Total Price
Preset Keys:	88 One-Touch Preset Keys
Programmable PLU's:	Up to 3800 PLU's
Power Requirements:	115-60-1, .9 amps
Cord and Plug:	Attached 6 ft. Flexible 3 Wire Cord and Plug Fits Grounded Receptacle
Tare:	Automatic or Digital Entry
Scale Dimensions:	16.13"W x 16.25"D x 6.75"H (40.97cm W x 41.27cm D x 17.14cm H)
Zero:	Auto Zero Tracking on Power Up
Keypad:	Laminated Membrane, Audible Tone Feedback
Weight:	Net 21 lbs. (9 kgs.), Shipping 25 lbs. (11.3 kgs.)
Shipping Dimensions:	19"W x 19"D x 10"H (48.3cm x 48.3cm x 25.4cm)

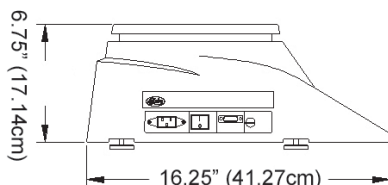

**GLOBE FOOD EQUIPMENT COMPANY**  
www.globeslicers.com

2153 Dryden Rd  
Dayton, OH 45439  
Phone: 937-299-5493  
Phone: 800-347-5423  
Fax: 937-299-4147