Project



Item #

Quantity

**GLOBE FOOD EQUIPMENT COMPANY** 

60 Quart Pizza Mixer

# SP62P **60 Quart Pizza Mixer**

NOW with electronic timer

## Built into each mixer is the quality of design and workmanship synonymous with Globe.

#### Model

□ SP62P - 60 Quart Pizza Mixer



SP62P



flobe

- Rigid cast iron body
- High torque direct gear drive transmission
- Oil bath transmission
- Heat-treated hardened steel alloy gears and shafts
- Stainless steel bowl guard with built in ingredient chute
- Industry standard #12 attachment hub
- Non-slip rubber feet
- NSF approved enamel gray paint

#### **Standard Accessories**

- 60 quart stainless steel bowl
- Spiral dough hook (aluminum)
- Bowl truck

#### Warranty

Two-years parts and one-year labor

#### Standard Features

- Powerful 3 HP custom built motor
- Two fixed speeds
- Capacity: up to 50 lbs. of flour (75 lb. batch size)
- Front mounted digital timer and controls
- Safety interlocked bowl guard and bowl lift
- Thermal overload protection
- Power bowl lift
- · Automatic safety shut off provides superior motor and transmission protection

#### **Optional Attachments/Accessories**

- Slicer/shredder/grater for #12 hub
- Meat grinder for #12 hub
- Correctional Package

Approved By:\_\_\_\_\_

Date:

GLOBE FOOD EQUIPMENT COMPANY

www.globeslicers.com



2153 Dryden Rd. Dayton, OH 45439 Phone: 937-299-5493 Phone: 800-347-5423 Fax: 937-299-4147


SP62P



## 60 Quart Pizza Mixer

### SP62P



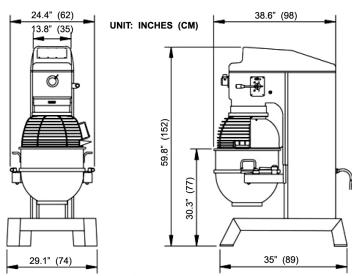

SPECIFICATIONS											
Model	Motor	Volts	Amps	Transmission Type	Capacity	Controls	Power Bowl Lift	Agitator Sp First	eeds (RPMs) Second	Attachment S First	Speeds (RPMs) Second
SP62P (1 Phase)	3 HP	220/60/1	16	Gear	60 qt / 56.8L	Digital, Front mounted	1/8 HP Motor	72	116	234	410
SP62P (3 Phase)	3 HP	208/60/3	12	Gear	60 qt / 56.8L	Timer & Controls					

STANDARD FEATURES & ACCESSORIES:	OPTIONAL ATTACHMENTS:				
<ul> <li>60 Quart #304 series stainless steel bowl</li> <li>Aluminum spiral dough hook</li> <li>Stainless steel bowl guard with built in ingredient chute</li> <li>Digital, front mounted timer and controls</li> <li>Heavy duty bowl truck</li> <li>#12 attachment hub</li> <li>Direct drive, fixed speed transmission provides high torque mixing power</li> <li>Thermal overload protection (automatic reset)</li> <li>NSF approved enamel gray paint</li> <li>6 foot cable, hard wired</li> </ul>	<ul> <li>Chopper Plate Sizes Available:</li> <li>CP02-12 1/16" (2mm)</li> <li>CP04-12 5/32" (4mm)</li> <li>CP05-12 3/16" (5mm)</li> <li>CP06-12 1/4" (6mm)</li> <li>CP08-12 5/16" (8mm)</li> <li>CP10-12 3/8" (10mm)</li> <li>CP12-12 1/2" (12mm)</li> <li>CP14-12 9/16" (14mm)</li> <li>CP16-12 5/8" (16mm)</li> <li>CP18-12 11/16" (18mm)</li> <li>CP00-12 Stuffing Plate</li> <li>XST12 1/2" stuffing tube (sheep)</li> <li>XST34 3/4" stuffing tube (hog)</li> </ul>	<ul> <li>XMCA-SS Meat Grinder Assembly (Polished stainless steel cylinder, worm gear, ring, and pan. Includes knife, 3/16" plate, stainless steel pan, and pusher.)</li> <li>XXCORR62 Correctional package includes tamper resistant external fasteners.</li> <li>XVSGH 9" Slicer/Shredder/ Grater Housing Only (no plates included-must select from plates below)</li> <li>XASP Adjustable slicing plate</li> </ul>	<ul> <li>Shredding XSP332*</li> <li>XSP316*</li> <li>XSP14*</li> <li>XSP516*</li> <li>XSP12*</li> <li>XGP*</li> <li>XPH Plate required</li> </ul>	3/32" 3/16" 1/4" 5/16" 1/2" Grating	(2.3mm) (4.7mm) (6.3mm) (7.9mm) (12.7mm) ) plate

#### **DIMENSIONS & SHIPPING INFORMATION**

Cartons are reinforced for shipping. The weight and dimensions of this reinforced carton are included below and may vary from shipment to shipment. *This product ships on a pallet.* 

Model	Foot Print	<b>Overall Dimensions</b>	Net Weight	Shipping Dimensions	Shipping Weight
SP62P	35" D x 29.1" W	38.6" L x 29.1" W x 59.8" H	980 lbs.	48" W x 48" D x 76" H	1,228 lbs.
	(89 cm x 74 cm)	(98 cm x 74 cm x 152 cm)	(444 kg)	(122 cm x 122 cm x 193 cm)	(556 kg)



## GLOBE FOOD EQUIPMENT COMPANY www.globeslicers.com

2153 Dryden Rd. Dayton, OH 45439 Phone: 937-299-5493 Phone: 800-347-5423 Fax: 937-299-4147

Freight Class 85