

Production Equipment 3200 Series

Freezer Equipment Stands
Stainless Steel Top, Self-contained



3262-SF shown with options

SPECIFICATIONS:

TOP: Die-formed construction of one-piece 18 GA stainless steel type 304-#4 finish with 1 1/8" high marine edge nosing, ends and back turned up to match front

EXTERIOR: Back and bottom of 20 GA steel with painted enamel finish, Body supported by 14 GA galvanized steel box channels for legs, Ends of 20 GA stainless steel, type 304-#4 finish

CONDENSER HOUSING: Fitted with an "easily removable" Clip-on Snap-in louvered panel

INTERIOR: Bottom, Back, and Ends of 22 GA stainless steel type 304-#2B finish, Top of aluminum

INSULATION: Rigid Polyurethane Foam

DRAWER JAMS: One-piece high-impact plastic with concealed magnets on perimeter for positive sealing and jam heaters to prevent gasket freezing

DRAWERS: Exterior of one-piece die-stamped 22 GA stainless steel type 304-#4 finish, Interior of high-impact plastic, Gasket mounted w/ aluminum strips and screws for easy removability and to ensure a proper seal, Drawer frame of combination 20 GA and 16 GA stainless steel and corrosion resistant 1 5/16" rollers w/ ball bearing assembly, Each drawer includes (2) removable 12x20x4 dp polycarbonate pans front to back with (1) stainless steel divider support bar

LEGS: Removable 6" high x 1 5/8" tubing welded to steel plate and fastened to body support channel, Bullet foot has 1 1/8" of adjustment, legs of stainless steel

REFRIGERATION: Self-Contained unit has low temperature balanced system using a hermetically-sealed condenser, Unit has forced air evaporator w/ protective coated coil and expansion valve, defrost heater, and timer, System comes assembled w/ cord & plug 5-15-P, tested to operate between -5 and 0 degrees F

ITEM # _____

PROJECT _____

DATE _____

MODEL	DIM
3262-SF	62"L x 31.5"D
3288-SF	88"L x 31.5"D
3216-SF	116"L x 31.5"D

FEATURES

- Refrigerated System has expansion valve and control for rapid, accurate recovery
- Stainless Steel ends
- Condensate Evaporator
- Legs removable in field
- Uniform integration in design, quality, and parts
- Self-closing drawers w/ (2) 12x20x4 dp polycarbonate pans ea.
- Automatic Defrost timer and evaporator heater provided
- Door jam heaters to prevent gasket freezing

OPTIONS

- Casters in lieu of legs
- (1) Door in place of (2) Drawers
- Adjustable Wire Shelf (per door)
- Cutting boards: 9 1/2" x 1/2" Richlite board w/ s/s brackets
- Full Extension Drawer Slides

Production Equipment 3200-SF

Freezer Equipment Stand

Self-contained



3262-SF



3288-SF



3216-SF

OPTIONS

(1) Door in place of (2) drawers



9 1/2" x 1/2" Richlite Board
w/ S/S Brackets




STATISTICAL DATA

MODEL	LGTH	DRAWERS PER UNIT	CAPACITY CUBIC FOOT	CONDENSING UNIT ¹	VOLTS/ CYCLE/ PHASE	TOTAL ² AMPS	NEMA PLUG	SHIP WT.
3262-SF	62"	2	3.44	1/4-HP R404	115v/60/1	6.9	5-15-P	430#
3288-SF	88"	4	5.68	1/3-HP R404	115v/60/1	9.7	5-15-P	560#
3216-SF	116"	6	7.92	1/2-HP R404	115v/60/1	12.6	5-15-P	675#

NOTE:

1. Custom Units may require upgraded BTU ratings on evaporator coil and/or condensing unit
2. Hot gas condensate evaporator is factory recommended, If electric condensate evaporator is required, add .39 AMPS to total

MECHANICAL DATA

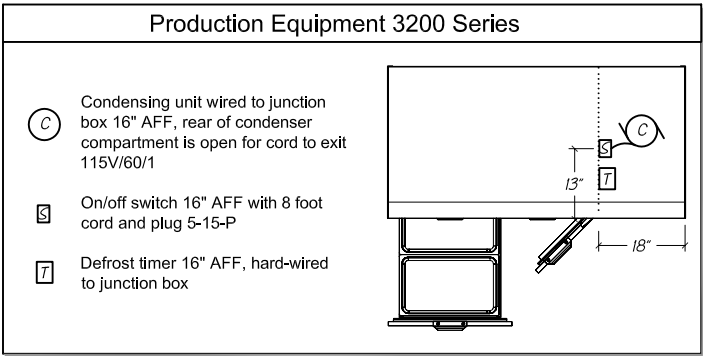

SECTION VIEW

