

Project Name:

Location:

Item:

Qty.:

Model:

MCR-23FD/MCF-23FD

MAXXCOLD REFRIGERATOR/FREEZER



MODEL MCR-23FD/MCF-23FD

FEATURES

MaxxCold reach-in Refrigeration is built to last.

- Stainless steel exterior and interior ensures years of long life and maximum durability.
- Simple plug-in installation.
- Internal storage capacity is 20.5 cu. ft.
- Field reversible door.
- CFC-free polyurethane foam insulation.
- (3) heavy-duty, adjustable, PE coated wire shelves.
- Door locks and 4" diameter swivel casters come standard.
- Utilizes environmentally friendly CFC-free refrigerant, Refrigerator - R134A / Freezer - R404A.
- Bottom mount compressor provides energy savings and ease of service.
- Automatic defrost system.
- Digitally controlled temperature system maintains optimum temperature and LED display is easily viewed from exterior.
- Holding Temperature: Refrigerator 28°F to 39°F / Freezer 5°F to -9.4°F.
- Open door alert, beeps when door has been open for 5 minutes.
- Large evaporator and condenser for quick cooling and greater efficiency.
- Horsepower: Refrigerator - 1/3 HP / Freezer - 1/3 HP
- Automatic interior lighting.
- Self contained system.
- Recessed handles.
- 15 amp plug.




Specifications subject to change without notice.

Approvals:

MCR-23FD/MCF-23FD

MAXXCOLD REFRIGERATOR/FREEZER

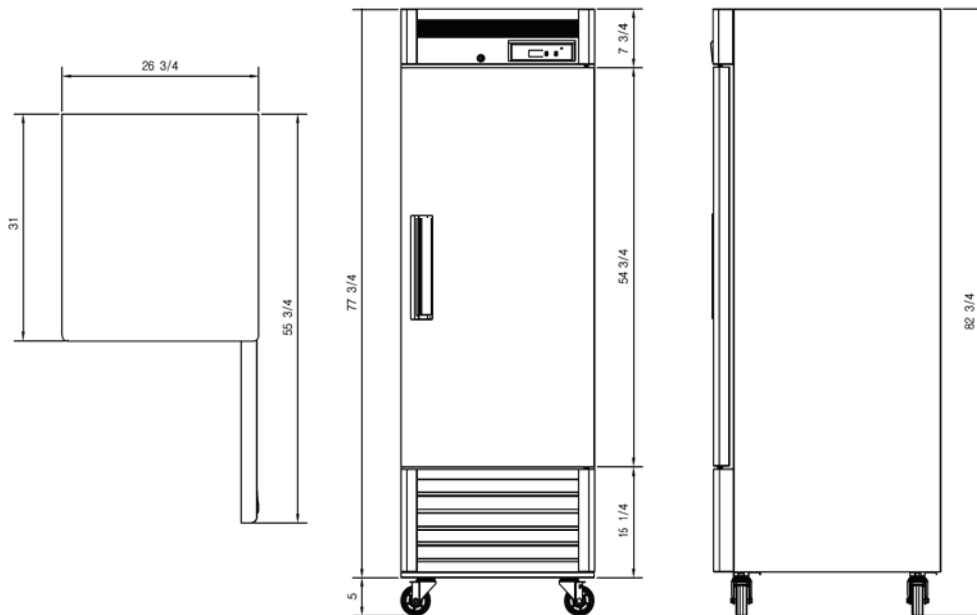

Dimensional Data

Model	Width	Depth	Height	Weight	Voltage	Hp	Amps	Refrigerant	Cubic Ft.	Holding Temperature
MCR-23FD	26 3/4"	31"	82 3/4"	271 lbs.	115V	1/3	6.0	R134A	20.5	28°F to 39°F
MCF-23FD	26 3/4"	31"	82 3/4"	284 lbs.	115V	1/3	6.0	R134A	20.5	5°F to -9.4°F

MaxxCold reach-in Refrigeration is built to last.

- Stainless steel exterior and interior ensures years of long life and maximum durability.
- Simple plug-in installation.
- Internal storage capacity is 20.5 cu. ft.
- Field reversible door.
- CFC-free polyurethane foam insulation.
- (3) heavy-duty, adjustable, PE coated wire shelves.
- Door locks and 4" diameter swivel casters come standard.
- Utilizes environmentally friendly CFC-free refrigerant, Refrigerator - R134A / Freezer - R404A.
- Bottom mount compressor provides energy savings and ease of service.
- Automatic defrost system.

- Digitally controlled temperature system maintains optimum temperature and LED display is easily viewed from exterior.
- Holding Temperature: Refrigerator 28°F to 39°F / Freezer 5°F to -9.4°F.
- Open door alert, beeps when door has been open for 5 minutes.
- Large evaporator and condenser for quick cooling and greater efficiency.
- Horsepower: Refrigerator - 1/3 HP / Freezer - 1/3 HP
- Automatic interior lighting.
- Self contained system.
- Recessed handles.
- 15 amp plug.