



Foodservice Equipment

Job _____ Item# _____

Twin Pot Electric Fryer

TMFE30

Standard Features:

- Two easy removal 15 lb. lift-out nickel plated steel kettles.
- Immersion-type tubular heating elements rated at 11,500 watts.
- Swing up basket design.
- Snap-action thermostat ranges from 200°F to 375°F.
- High-limit safety thermostat, on-off switch and indicator light.
- Two large nickel plated steel mesh side hanging baskets (8-3/4"W x 5-1/4"D x 10"L).
- Adjustable 4" legs.



TMFE30

Applications:

The Toastmaster Electric Countertop Fryer is the most economical and flexible Electric Countertop Fryer in the food service industry. It offers unsurpassed performance, combining proven control system with Toastmaster quality and durability. They are designed to efficiently fry a wide variety of products by immersion into heated liquefied shortening.

General Information:

The fryers are equipped with

immersion type stainless steel tubular heating elements which swing up separately for cleaning and kettle removal. The elements configuration surrounds the sides, front, back and bottom of the shortening container. A handle is provided for raising and lowering the heating elements.


Warranty:

Toastmaster fryers are covered by Toastmaster's one year parts and labor warranty.



Twin Pot Electric Fryer

TMFE30

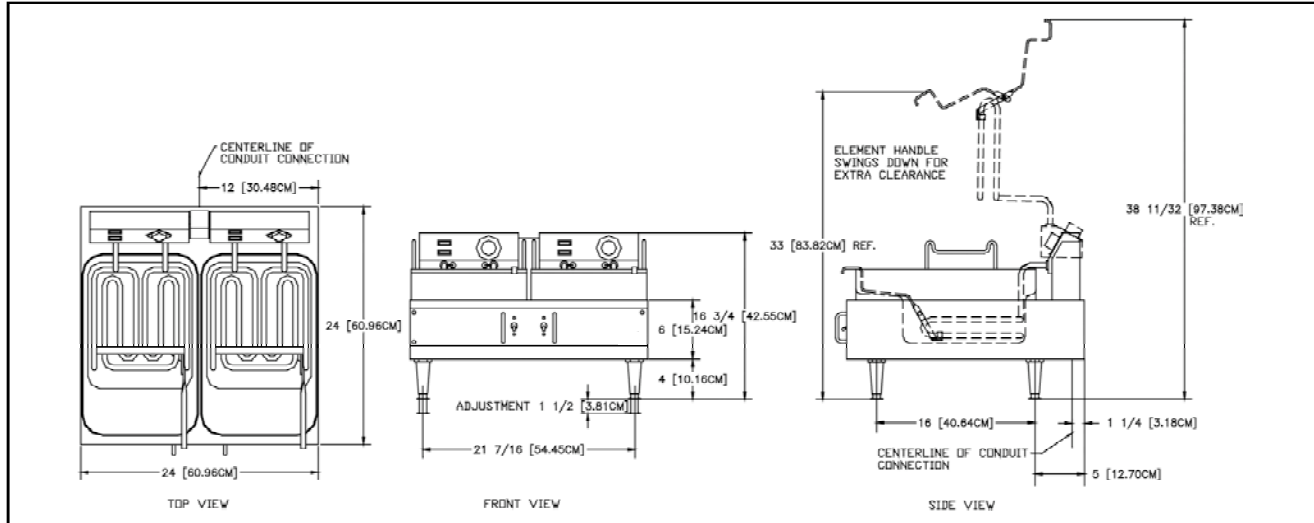

Model Number	TMFE30
Overall Dimensions	24" W x 16-3/4" H x 24" L
Fat Container	10-1/2" W x 4-3/4" H x 12-1/2" L
Foam Compartment	24" W x 16-3/4" H x 24" L
Cooking Surface Height (In.) (cm)	10 (25.4)
Installed Weight (lbs.) (kg)	69 lbs. (31.3)
Shipping Weight (lbs.) (kg)	81 lbs. (36.7)
Pre-Heat time to 350° F (177° C)	4-1/2 minutes
Fat Capacity	30 lbs. (13.6 kg)
Pounds of French fries per hr.	64 lbs. (29.0 kg)
Watts per hr. to maintain 350° F	430

4" (10cm) legs with 5-3/8" (13.7cm) adjustment

Model No.	Rated Wattage		Nominal Amps - Single Phase	
	208V	240V	208V	240V
TMFE30	8,638	11,500	41.5	47.9

Typical Specifications:

Electric fryers have a stainless steel body. A 200° - 375° (93°C - 190°C) adjustable thermostat and a hi-limit safety thermostat, and a separate on-off switch are standard for each section. Two nickel plated, removable 15 lb. (6.8 kg) capacity steel kettles and 4" nickel-plated die-cast legs are standard. Unit has tubular type, two position, swing-up elements with a rated wattage of 5750 watts on 240 volts. Two side mounted nickel plated, perforated steel mesh baskets are provided as standard. UL listed to US and Canadian standard. UL Classified to NSF STD 4. Printed in the U.S.A.

INTENDED FOR COMMERCIAL USE ONLY. NOT FOR HOUSEHOLD USE. TM110/1060



Toastmaster, in line with its policy to continually improve its product, reserves the right to change materials or specifications without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions, or replacements for previously purchased equipment.



Toastmaster® 10 Sunnen Dr, St. Louis MO 63143 • www.toastmastercorp.com
Toll Free: 1-800-264-7827 • Telephone: 1-314-781-2777 • Fax: 1-314-781-3636