



PROJECT:	MODEL:	QUANTITY:	ITEM NO:

MOBILE BARS & BACK UP SERVICE

For Conventional Beverage Service Using Cans and Bottles

ARCHITECTURAL "AS-CB-MW" SERIES

Increase beverage sales with a portable bar - built to serve as the toughest bar in town!

- 1** Portable bars are perfect for hosting an event in any environment
- 2** All architectural series bars come standard with a towel holder, removable speed rail and a stainless steel ice sink with shut off drain valve
- 3** Made from real wood - classic architectural series is built from traditional, solid mahogany and finished in a rich Cherry stain
- 4** Old world craftsmanship - raised solid wood panels, elegant fluted columns, and over-sized "Chicago Arm" bar top
- 5** The sanitary stainless steel work areas and interior make clean up quick and easy
- 6** FWE's architectural AS-CB-MW series bars are for bottle and can service
- 7** Made for mobile applications - FWE architectural series bars are constructed with a one piece stainless steel tubular welded base frame, and designed to absorb vibration and shock during transport
- 8** Matching back bars and ice carts are available

***Two year limited warranty**




AS-CB-6-MW



AS-PSC-6-MW



AS-IC-200-MW




Perfect For Event Hosting



Removable Speed Rail



Ice Sink With Cover




Wood Craftsmanship



made to serve you better

SPECIFICATIONS:

MOBILE BARS & BACK UP SERVICE

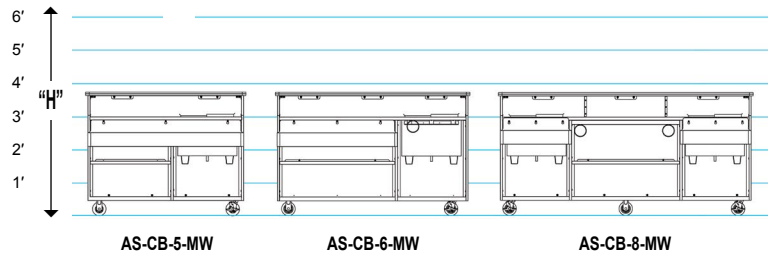

"ARCHITECTURAL SERIES" BARS						Consult Factory for SHIPPING CLASS
MODEL NUMBER	LENGTH	WORKING AREA HEIGHT [A]	BULK STORAGE AREA	BOTTLE RACK [B] CAPACITY	CASTER SIZE	SHIP WT. LBS. (KG)
AS-CB-5-MW	60" (1524)	35.5" (902)	27" H x 23" D	8 qts	5"	525 (237)
AS-CB-6-MW	73" (1854)	35.5" (902)	27" H x 23" D	12 qts	5"	570 (259)
AS-CB-8-MW[C]	96" (2438)	35.5" (902)	27" H x 23" D	16 qts	5"	868 (394)

[A] Overall dimensions are 47.5" H x 33" D.
 [B] Removable bottle speed rack extends 3.5" beyond depth dimension.
 [C] Dual station model furnished with 2 sinks.

"ARCHITECTURAL SERIES" COMPANION PIECES			
MATCHING BACK BAR	LENGTH	WORKING AREA HEIGHT	OVERALL HEIGHT
AS-PSC-6-MW	73" (1854)	39.75" (1010)	78.5" (1994)
			MATCHING ICE CART 200 lb. capacity AS-IC-200-MW Height: 33.5" (851) Deep: 24.5" (622) Width: 24.5" (622)

BAR COMPANION PIECES:

MATCHING BACK BAR WITH MIRRORRED CANOPY.
 Super back-up! Stores extra liquor, glasses and bar accessories. Convenient work / serve top in choice of laminate. Recessed can lights above handsome Mirrored Canopy. Interior shelves adjustable on 1.5" spacings. Welded steel frame assures years of profitable use. Large 5" casters with brakes allows easy mobility.

MATCHING ICE STORAGE CART. Holds 200 lbs. of ice!. Fully insulated. Flip-top stainless lid. Drain, push bar handle, and all swivel 5" casters. Welded steel frame.
 33.5" (H) x 24.5" (D) x 24.5" (W).

EXTERIOR. Classic raised solid Mahogany wood panels, fluted columns, crown molding and beveled edge "Chicago Arm" style bar top. Durable solid serving surface. Solid brass kick plate provided in front and sides of unit. All wood surfaces finished with polymer coating to deter scratching and gouging. Constructed with reinforced joints for additional strength and durability. Solid hardwood: Mahogany; Finish: Cherry.

INTERIOR (WORKING SIDE). Heliarc welded single unit construction shall consist of welded base worktop frame of 1" square steel tubing. Base frame shall have additional 10-gauge stainless steel corner plate reinforcements. Full length heavy gauge stainless steel angles reinforce front corners of body on inside, with high impact edging on outside corners. Work surface shall be constructed of 20-gauge stainless steel. Interior of body shall be lined with 24-gauge stainless steel bonded to walls and bottom storage area. Seams shall overlap for

greater durability and moisture resistance. Work and splash areas shall be polished stainless steel with easy-to-clean coved corners. Front edge of work area shall have raised marine nosing to retard spills.

CASTERS. Maintenance free polyurethane tire casters in a configuration of two (2) rigid and two (2) swivel with brake. Casters shall have a reinforced yoke mounted to 10-gauge caster plate. The caster mounting plate shall be secured to a 10-gauge stainless steel reinforcing stress plate via welded in place stainless steel studs. The reinforcing stress plates shall be welded to the heavy gauge tubular frame of the unit. Eight (8) foot models are equipped with six (6) casters: four (4) rigid casters and two (2) swivel with brake.

STORAGE AREA. On six (6) foot models, the glass storage area shall include removable and adjustable stainless steel shelf. On all models, the bottom storage area shall be stainless steel lined.

ICE SINK. Sink shall be one-piece stainless steel

with coved corners: 18.5" x 16" x 6.5" deep with shut-off drain valve. Sink shall be undercoated to retard condensation.

BAR ACCESSORIES. Standard equipment shall include 5" deep, heavy gauge stainless steel bottle speed rack extending 3.5" beyond depth dimension; removable without tools. Towel ring shall be provided under top work surface.

INSTALLATION. Unit should not be installed in an area where adverse environmental conditions are present.

- Optional Accessories**
- DOORS**
 - Locking doors for storage areas
 - CASTERS**
 - All swivel casters
 - Floorlocks (set of 2)
 - EXTRAS**
 - Locking bottle speed rack
 - Extra stainless steel shelves
 - Stainless steel bar gutters
 - Protective storage cover

FWE products may be covered under one or more of the following U.S. patents:
 288,299;238,300;3,952,609;4,192,991.
 All rights reserved.
 All specifications subject to change without notice.
 Errors subject to correction.
 © 15 Food Warming Equipment Company, Inc.
 R. 15.02



FOOD WARMING EQUIPMENT COMPANY, INC.
 5599 HWY. 31 W. Portland, TN 37148
 800.222.4393 | 815.459.7500 | Fax: 815.459.7989
 www.FWE.com | sales@fwe.com

