

| PROJECT: | MODEL: | QUANTITY: | ITEM NO: |
|----------|--------|-----------|----------|
| | | | |
| | | | |

MOBILE BARS & BACK-UP

For Beverage Service Using Pre-Mix / Post-Mix / Bag-in-Box

WEATHER-ALL "SBBC SERIES"



VEATHER-All Series

Decorative Side: Stainless Steel Working Side: Stainless Steel





Specify Dispensing System Sink and Fittings at time of order:

- o "PR" for Pre-Mix Dispensing System
- o "PO" for Post-Mix Dispensing System
- o "PO-BIB" for Post-Mix Bag-in-Box Dispensing System

Note: Additional charges for factory installation of beverage dispensing system.



These rugged bars are constructed from all stainless steel for year-round indoor/outdoor usage.



Constructed entirely of stainless steel, these attractive and functional bars are tough enough to be used outside year-round, and beautiful enough to grace the most elegant banquet hall. Neither high humidity or inclement weather present a problem to the versatile Weather-All bar.

Use it inside, poolside, oceanside or beach. It will give years of durable, dependable service when properly maintained.

Because it's completely mobile on 5 inch diameter polyurethane tire casters, you can roll it to where the crowds (and profits) are, to save table service, labor and provide faster service to customers.

For even more efficient service, the matching Weather-All Ice Cart and Back Bar are perfect companions to FWE's functional indoor/outdoor bar.

- ♦ Indoor / outdoor usage
- ♦ Welded steel top and bottom frames
- ♦ Raised marine front edge retard spills
- ♦ Rugged polyurethane tire casters
- ♦ 6 circuit sealed-in cold plate sink
- ♦ 60 lb. ice capacity with stainless steel sliding cover
- Stainless steel work surface and splash area with coved corners
- ♦ Removable bottle speed rack
- ♦ Handy compartmented server
- ♦ Towel ring
- ♦ Tank storage area
- ♦ Opening(s) for dispensing gun tubing
- ♦ Two year limited warranty




PROJECT: MODEL: QUANTITY: ITEM NO:

SPECIFICATIONS:

WEATHER-ALL "SBBC SERIES" BARS

available with matching Back-Up Bar and Ice Cart

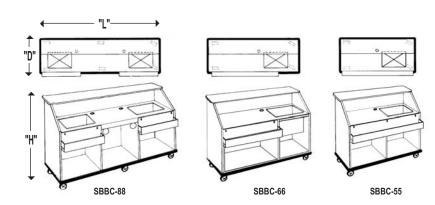

| OVERALL EXTERIOR DIMENSIONS IN. (mm) | | | | | Consult Factory for SHIPPING CLASS | | | |
|--------------------------------------|------------------|--------------------|-----------------|---------------------------|---------------------------------------|-----------------------------------|----------------|---------------------------|
| MODEL NUMBER | HIGH "H" | DEEP "D" [A] | LONG "L" | WORKING AREA HEIGHT | PRE-MIX Tank Capacity | BOTTLE RACK Capacity [A] | CASTER SIZE | SHIP WT . LBS. (KG) |
| SBBC-5 (Without Bumper) | 45.75" (1162) | 29.25" (743) | 60" (1524) | 35.5" (902) | 4 | 12 qts | 5" | 250 (213) |
| SBBC-55 with Full Bumper | 45.75" (1162) | 29.75" (756) | 60.5" (1543) | 35.5" (902) | 4 | 12 qts | 5" | 275 (136) |
| SBBC-6 (Without Bumper) | 45.75" (1162) | 29.25" (743) | 72" (1829) | 35.5" (902) | 6 | 12 qts | 5" | 300 (136) |
| SBBC-66 with Full Bumper | 45.75" (1162) | 29.75" (756) | 72.5" (1842) | 35.5" (902) | 6 | 12 qts | 5" | 330 (150) |
| SBBC-8 (Without Bumper) | 45.75" (1162) | 29.25" (743) | 96" (2438) | 35.5" (902) | 8 | 16 qts | 5" | 630 (286) |
| SBBC-88 with Full Bumper | 45.75" (1162) | 29.75" (756) | 96.5" (2451) | 35.5" (902) | 8 | 16 qts | 5" | 490 (222) |

[A] Removable bottle speed rack extends 3.5" beyond depth dimension.



ICE STORAGE CART SIC-222

Holds 200 lbs. of ice! Fully insulated. Flip-top stainless lid. Drain, push bar handle, and all swivel 5" casters. Welded steel frame.



Enclosed on 3-sides! Stores glasses and bar accessories. Convenient work/serve black top. Stainless steel interior shelves on 9.5", 11.5", and 14" spacings. Welded steel frame. 5" casters.

| OVERA | ICE | | SHIP WT. | | | | |
|--------------------------|-----------------|----------------|----------------|------------------|----------------|--------------|--|
| MODEL NUMBER | HIGH "H" | DEEP "D" | LONG "L" | TANK CAPACITY | CASTER SIZE | LBS. (KG) | |
| SIC-200 (Without Bumper) | 33.5" (1156) | 24.5" (648) | 24.5" (648) | 200 lbs | 5" | 140 (64) | |
| SIC-222 with Full Bumper | 33.5" (1156) | 26.5" (673) | 26.5" (673) | 200 lbs | 5" | 150 (68) | |

| | OVERALL EXT | SHIP WT. | | | |
|--------------------------|-----------------|----------------|---------------|----------------|--------------|
| MODEL NUMBER | HIGH "H" | DEEP "D" | LONG "L" | CASTER SIZE | LBS. (KG) |
| SPSC-4 (Without Bumper) | 45.5" (1156) | 26.5" (673) | 48" (1219) | 5" | 480 (218) |
| SPSC-44 with Full Bumper | 45.5" (1156) | 28.5" (724) | 50" (1270) | 5" | 500 (227) |
| SPSC-6 (Without Bumper) | 45.5" (1156) | 26.5" (673) | 72" (1829) | 5" | 555 (252) |
| SPSC-66 with Full Bumper | 45.5" (1156) | 28.5" (724) | 75" (1905) | 5" | 575 (261) |
| SPSC-8 (Without Bumper) | 45.5" (1156) | 26.5" (673) | 96" (2438) | 5" | 600 (272) |
| SPSC-88 with Full Bumper | 45.5" (1156) | 28.5" (724) | 98" (2489) | 5" | 620 (281) |

WEATHER-ALL BARS:

CONSTRUCTION. Heliarc welded, single unit construction shall consist of welded stainless steel base frame of heavy gauge 1" square stainless steel tubing with extra 10-gauge stainless steel caster corner plate reinforcements.

BODY / TOP MATERIALS. Shall be stainless steel, heliarc welded; ground and polished. Interior work surface shall be constructed of stainless steel, with easy-to-clean coved corners. Front edge of work surface shall have raised marine nosing to retard spills.

CASTERS. Polyurethane tire casters in a configuration of two (2) rigid, and two (2) swivel with brake. Casters shall have a reinforced yoke welded to 10-gauge caster mounting plate. The caster mounting plate shall be secured to a 10-gauge stainless steel reinforcing stress plate via welded in place stainless steed studs.

The reinforcing stress plates shall be welded to the heavy gauge tubular frame of the unit. Eight (8) foot models are equipped with six (6) casters: four (4) rigid casters and two (2) swivel with brake

BUMPERS. Full bumper models shall have solid 1-1/2" wide continuous wraparound aluminum channel, bolted to frame, with snap-in, non-marking replaceable vinyl cushion. Full perimeter bumper shall be continuous, for added protection, with corner cut-outs to facilitate cleaning.

STORAGE AREA. On six (6) foot models, the glass storage area shall include a stainless steel shelf. On all models, the bottom storage area shall be stainless steel lined. Tank storage area shall accommodate a minimum of four (4) 5-gallon premix tanks, and CO₂ tank.

ICE SINK WITH SEALED IN COLD PLATE.

Sink shall be one-piece stainless steel with coved corners: 19-3/4" x 12-3/4" x 10-1/2" deep. Sink shall have enclosed foam insulation with drain and line fittings. 6 circuit sealed-in cold plate shall be compatible for use with Pre-Mix, Post-Mix, and Bag-in-Box systems. Sink shall have a capacity of 60 lbs., and be provided with a stainless steel sliding cover. Specify system to be used: Pre-Mix, Post-Mix or Bag-in-Box.

BAR ACCESSORIES. Standard equipment shall include 5" deep, heavy gauge stainless steel bottle speed rack extending 3-1/2" beyond depth dimension of 31.5"; removable without tools. Towel ring shall be mounted to working side. Handy compartmented server will be included separately.

Optional Accessories:

- □ Locking bottle speed rack□ Extra stainless steel shelves
- □ Locking doors for storage areas
- ☐ Stainless steel bar gutters
- ☐ Pre-mix dispensing equipment
- □ Post-mix dispensing equipment
- ☐ Bag-in-Box dispensing equipment
- Protective storage cover
- ☐ All swivel casters
- □ All swivel with brake casters

FWE Products are used by major companies world-wide. We can modify, design, or custom build equipment to fit your special requirements.



Food Warming Equipment Company, Inc.