


INSTRUCTIONS FOR NEMCO TOMATO SLICER
REPLACEMENT BLADES: 466-1, 466-2, 466-3, & 466-7
BLADE INSTALLATION AND TENSIONING

1. REMOVE THE (2) THUMB SCREWS AND THE SLIDE STOP ON THE END OF THE SLIDE BOARD.
2. REMOVE THE PUSHER ASSEMBLY.
3. REMOVE THE BLADE HOLDER ASSEMBLY (BE CAREFUL OF THE SHARP BLADES) BY REMOVING THE (2) HEX HEAD SCREWS ON THE LEFT SIDE OF THE ASSEMBLY AND THEN THE (2) ON THE RIGHT SIDE OF THE ASSEMBLY.
4. INSTALL THE NEW BLADE ASSEMBLY WITH THE SHARP SIDE OF THE BLADES TOWARD THE PUSHER ASSEMBLY. THE HOLES ON THE END OF THE BLADE ASSEMBLY MUST MATCH THE HOLES IN THE BLADE HOLDER CASTING.
5. INSERT THE (2) HEX HEAD SCREWS THROUGH THE BLADE HOLDER AND INTO THE TENSION BAR AT THE RIGHT END OF THE BLADE HOLDER NEAREST THE "CAUTION SHARP BLADES". FULLY TIGHTEN WHILE ALTERNATING A ¼ TURN BETWEEN THE TOP AND BOTTOM SCREWS. WARNING. NOTE: THE TENSION BAR MUST BE COMPLETELY TIGHT AGAINST THE BLADE HOLDER CASTING. THERE SHOULD NOT BE A SPACE ON THIS END OF THE BLADE ASSEMBLY.
6. INSTALL THE (2) HEX HEAD SCREWS THROUGH THE BLADE HOLDER ON THE LEFT END.
7. TIGHTEN ¼ TURN ALTERNATING BETWEEN THE TOP AND BOTTOM HEX HEAD SCREWS UNTIL BOTH ARE FIRMLY TIGHT.

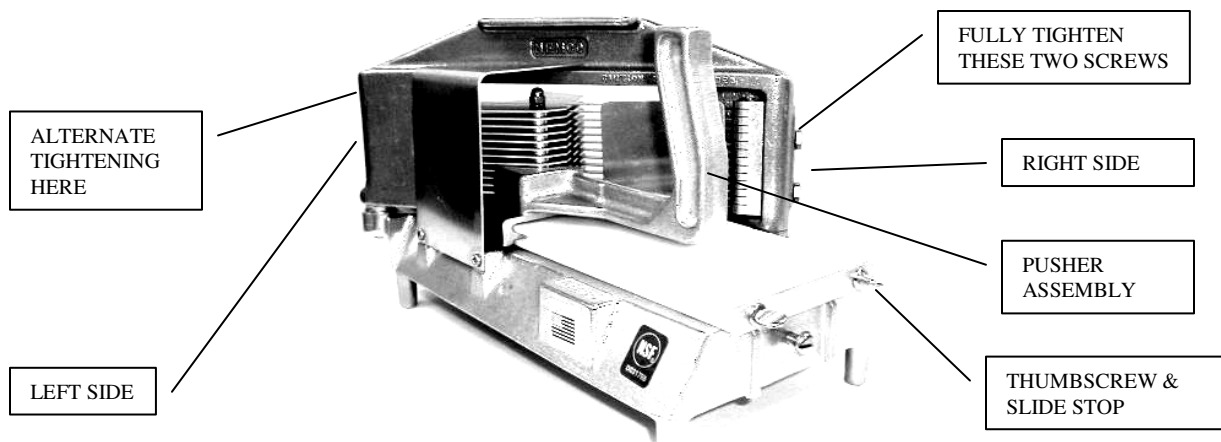

NEMCO FOOD EQUIPMENT
301 MEUSE ARGONNE, PO BOX 305, HICKSVILLE, OHIO 43526
PHONE (419) 542-7751