

# Crimsco Inc. Correctional Meal Delivery Specialists



## Model IHC Series Holding and Transport Cabinet For 10" x 14" Trays



IHC-72 SHOWN

### Standard Features

- ▼ 12 gauge Lockable transport latches
- ▼ Tamper proof fasteners throughout
- ▼ Rear Mounted removable Heating System
- ▼ Fully insulated
- ▼ Fully Welded Removable Tray Slides
- ▼ Lexan Covered Dial Thermometer
- ▼ Flush recessed door pull
- ▼ Heavy duty 8" casters
- ▼ Magnetic door closures
- ▼ All stainless steel
- ▼ Fully welded
- ▼ Super duty reinforced base
- ▼ Recessed doors
- ▼ Full perimeter bumper
- ▼ One year parts and labor warranty
- ▼ 12 gauge hinges

### IHC Series Meal Delivery Cabinets

These rugged, built to last delivery carts are fully insulated and are designed for secure, fast meal delivery service.

These cabinets are not just some restaurant style cabinets with security features attached. Our carts are manufactured from the ground up specifically for the correctional field.

Our reinforced fully welded base and double layer design, insures the elimination of any cabinet torque during transport.

Our "snap in" rear mounted, lockable, removable heating system is designed for ease of operation as well as security. Simply remove the heating unit and the cart is ready to be power washed.

The bottom line is, your environment is tough! Our standards are even tougher!

**Crimsco is corrections**

### Options

- ▼ Upgrade to semi-rigid casters
- ▼ Top box for (3) 18" x 26" cold pans
- ▼ Top rail (3 sides) to hold (2) 5-gallon beverage
- ▼ Drop down shelf


Crimsco a Division of *ITW* FEG

7737 N 81st Street ▼ Milwaukee, WI 53223 USA  
414-702-8972 ▼ 800-367-8413 ▼ Fax 414-354-2821

# Crimsco Inc. Correctional Meal Delivery Specialists



## Model IHC Series

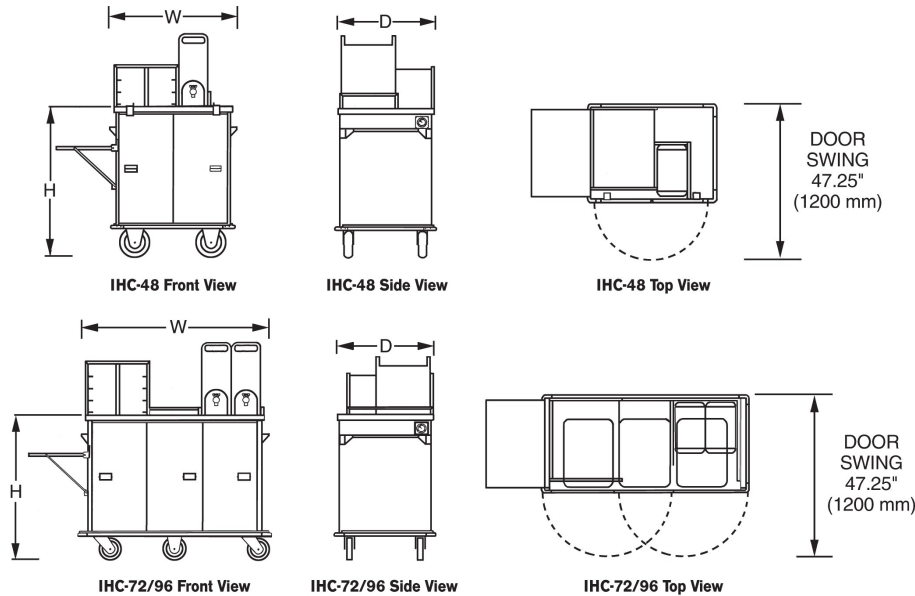

Model	Capacity	Width	Depth	Height	Weight	Electrical	NEMA	Casters
IHC-48	48 trays (10 x14)	38.875"	31.625"	48.625"	450lb	120v 1250 watt	115v, 8' 5-15P	8"
IHC-72	72 trays (10 x14)	55.125"	31.625"	48.625"	550lbs	120v 1250 watt	115v, 8' 5-15P	8"
IHC-96	96 trays (10 x 14)	55.125"	31.625"	59.375"	650lbs	120v 1250 watt	115v, 8' 5-15P	8"

### SPECIFICATIONS

**Construction:** Heliarc welded, fully insulated, stainless steel double pan construction. Support channels welded at base.

**Bumper:** Continuous wrap around non-marking bumper.

**Doors:** Double pan design, fully insulated, recessed, complete with 12 gauge hinges and recessed door pulls

**Heating system:** Heated by convected air. Removable, vertical rear mounted lockable heating unit with adjustable thermostatic control with a range of 110°F to 205°F (preset at 165°F) and automatic overload protection. Entire compartment insulated with (closed cell foam insulation), Dial thermometer equipped with lexan cover.

**Casters:** 8" super duty polyurethane casters mounted to 1/4 inch mounting plates. (4) swivel with brakes (2) rigid, except on the (IHC-48) which comes with (2) swivel with brakes and (2) rigid. Casters shall be secured to reinforced base channel with 3/8" carriage bolts.

**Security Detail:** All fasteners shall be tamper proof, hinges and transport latches are 12 ga. And fully welded.

**Racking:** Fully welded one piece shelving is removable for cleaning.

**Tray configuration:** (IHC-48)= 12 level, 2 columns, 2 trays deep. (IHC-72)=12 level, 3 columns, 2 trays deep. (IHC-96)=16 level, 3 columns, 2 trays deep.

Note: in line with its policy to continually improve its products, Crimsco Inc. reserves the right to change materials and specifications without notice.

**Crimsco a Division of *ITW* FEG**  
**7737 N 81st Street ▼ Milwaukee, WI 53223 USA**  
**414-702-8972 ▼ 800-367-8413 ▼ Fax 414-354-2821**