



Project:

Item Number:

Quantity:

MODULAR DROP-IN: TOP-MOUNT FABRICATOR WELL

MODELS:	36368	120V Fabricator Well
	36369	208-240V Fabricator Well



Modular Drop-In: Top Mount Fabricator Well

DESCRIPTION

The modular drop-in is designed for top-mount installation and requires hard-wiring. The drop-in comes complete with a 4-ft. (121.9 cm) control cord for remote installation of control.

The beveled edge is designed for easy cleaning.

Drop-in can operate wet or dry, however, moist operation is recommended for even heating of the food product. Meets NSF4 performance standards when using moist heat.

High-density glass fiber insulation and internal design features allow zero-clearance installation and use of 1000W elements

Stainless steel well is 6½" (16.51 cm) deep to allow use of full-size and fractional pans up to 6" (15.24 cm) deep while still providing moist heat. Adaptor bars are recommended when using fractional pans.

FEATURES

- ☐ Thermostatic control.
- ☐ Top is 20-gauge stainless steel, 18-8 Type 304, with approximately 1" (2.54 cm) overhang on all sides. 19⅞" x 11⅞" (50.48 x 30.16 cm) well opening.
- ☐ Deep drawn well is 20-gauge 18-8 stainless steel, 6½" (16.51 cm) deep.
- ☐ Standard 1000W heating element.
- ☐ Standard drain is ½" (1.27 cm) stainless steel fitting welded to pan with brass nipple extending below exterior housing. Drain screen included.
- ☐ Unit insulated on sides, ends, and below element assembly with high-density glass fiber insulation.
- ☐ Exterior housing is 20-gauge galvanized steel.
- ☐ Drop-in is supplied with stainless steel control panel for remote mounting of control.
- ☐ Control wires contained in flexible metal conduit.
- ☐ Standard mounting tabs provided for sheet metal counters.
- ☐ Optional mounting kit for laminate and solid surface countertops. Item No. 36370.
- ☐ Full one-year parts and labor warranty.

Agency Certifications



Approvals

Date:



www.vollrathco.com

The Vollrath Company, L.L.C.
1236 North 18th Street
Sheboygan, WI 53082-0611
U.S.A.
Main Tel: 800.624.2051
Service Tel: 800.628.0832
FAX: 800.752.5620

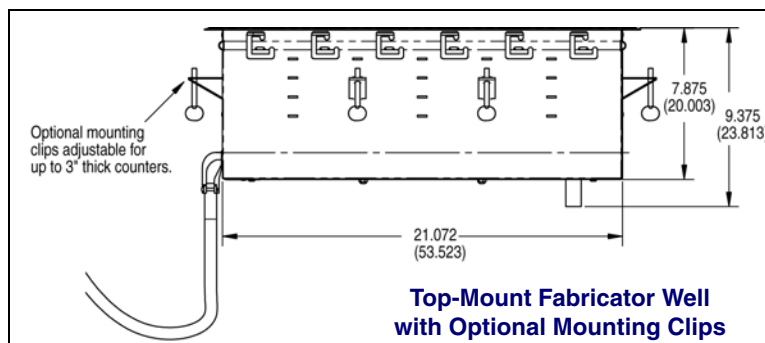
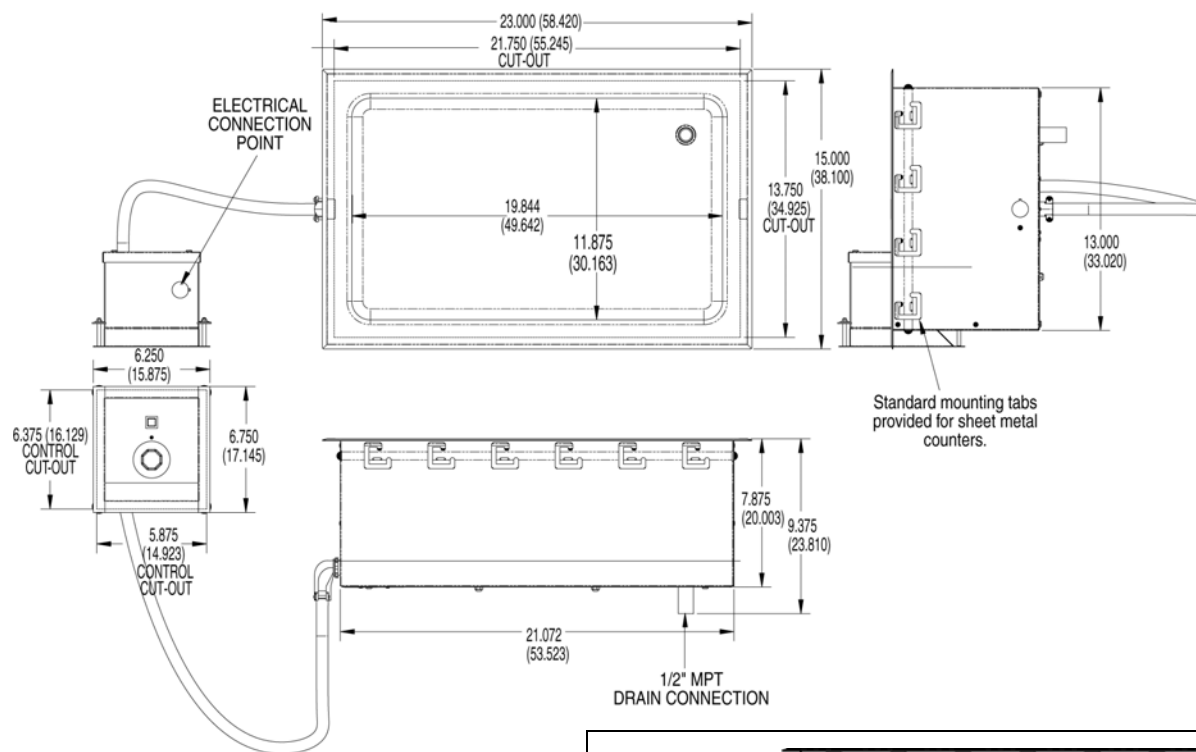
Vollrath of Canada, Co.
Tel: 800.695.8560
FAX: 800.752.5620

MODULAR DROP-IN: TOP-MOUNT FABRICATOR WELL

MODELS: 36368 120V Fabricator Well
36369 208-240V Fabricator Well

DIMENSIONS

- ❑ Overall Dimension: 15.00" x 23.00" (38.1 cm x 58.4 cm)
- ❑ Cutout Dimensions: 13.75" x 21.75" (34.9 cm x 55.2 cm)
- ❑ Control Panel Cutout Dimensions: 6.375" x 5.875" (16.129 cm x 14.923 cm)
- ❑ Dimensions shown in inches (cm).

**ELECTRICAL SPECIFICATIONS****Model 36368**

- ❑ 120V, 8.3 Amps
- ❑ 1000 Watts
- ❑ Single phase

Model 36369

- ❑ 208-240V, 3.6-4.2 Amps
- ❑ 750-1000 Watts
- ❑ Single phase



www.vollrathco.com

The Vollrath Company, L.L.C.
1236 North 18th Street
Sheboygan, WI 53082-0611
U.S.A.
Main Tel: 800.624.2051
Service Tel: 800.628.0832
FAX: 800.752.5620

Vollrath of Canada, Co.
Tel: 800.695.8560
FAX: 800.752.5620